




TEREX®

XT PRO SERIES Overcenter Aerial Device Mounted Over the Rear Axle

AERIAL DEVICES

Terex® Aerial Devices are known throughout the industry. They come with a long history featuring quality and innovative design.

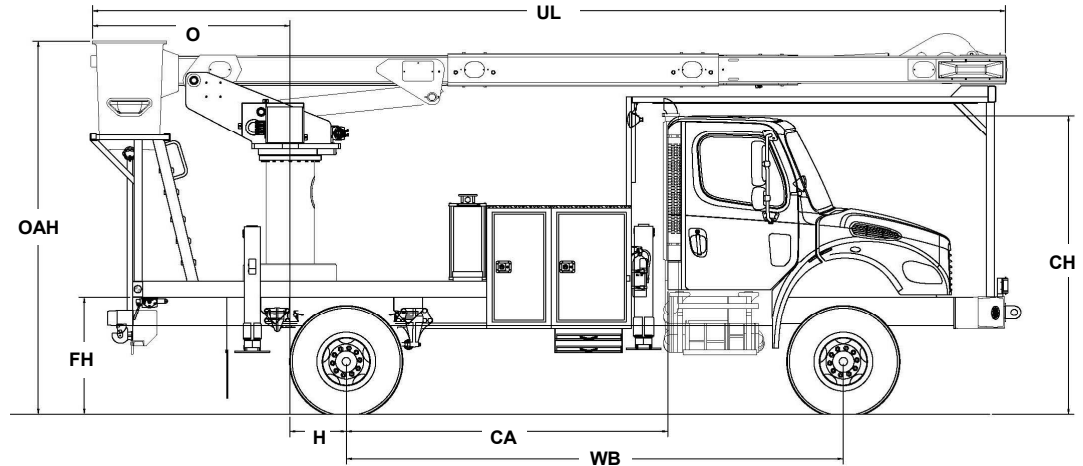

MEASUREMENTS	XT PRO 60	XT PRO 60/70
	ORA	ORA
Typical Frame Height (FH)	40 in. (101.6 cm)	40 in. (101.6 cm)
Typical Cab Height (CH)	108 in. (274.3 cm)	108 in. (274.3 cm)
Offset (O)	73.5 in. (186.7 cm)	73.5 in. (186.7 cm)
Overall Height (OAH)	10' 5" (3.2 m)	11' 10" (3.6 m)
Overall Length (OAL)	30' 0" (9.2 m)	30' 0" (9.2 m)
Unit Length (UL)	29' 7" (9.0 m)	29' 7" (9.0 m)
Center of Rotation (H)	21.5 in. (54.6 cm)	27.75 in. (70.5 cm)
Cab to Axle (CA)	102 in. (259 cm)	102 in. (259 cm)
Wheel Base (WB)	192 in. (487.7 cm)	192 in. (487.7 cm)
Front Axle (FA)	10,500 lb. (4,763 kg)	10,500 lb. (4,763 kg)
Rear Axle (RA)	15,000 lb. (6,804 kg)	19,000 lb. (8,618 kg)
Gross Vehicle Weight Rating (GVWR)	25,500 lb. (11,567 kg)	29,500 lb. (13,381 kg)
Recommended Weight for Stability	21,000 lb. (9,525 kg)	21,000 lb. (9,525 kg)
Frame Section Modulus	15.9 in ³ 18.0 in ³	15.9 in ³ 18.0 in ³
Frame Yield Strength	50,000 psi	50,000 psi
Frame RBM	795,000 in-lbs	795,000 in-lbs



TEREX®


3140 15th Avenue SE
PO BOX 1150
Watertown, SD 57201-6150
USA

Phone: (605) 882-4000
www.terex.com/utilities
Email: utilities.info@terex.com

Distributed By:

STANDARD EQUIPMENT

- Side Mounted 24" x 24" x 40" One Person Platform
- Platform Capacity of up to 400 lbs. (181 Kg)
- Control-Plus "3-D" Single Stick at Platform
- Safety Harness With Attached Lanyard
- Continuous Unrestricted Worm Gear Rotation
- Category "C" Rating Per ANSI A92.2
- Rectangular, Bi-Axial Epoxy Resin, Filament Wound Fiberglass Booms
- Individual Lever Lower Controls
- Mechanical Platform Leveling
- Full Pressure, Open-Center Hydraulic System
- 40 Gallon Hydraulic Oil Reservoir
- Padded Boom Rests with Upper Boom Tie Down
- Outrigger Interlock
- Moving Outrigger Alarm
- Truck Level Indicator
- 10-Year Leveling Chain
- Dual Hydraulic Tool Outlet at Boom Tip
- Manual Platform Tilt
- Finish Painted

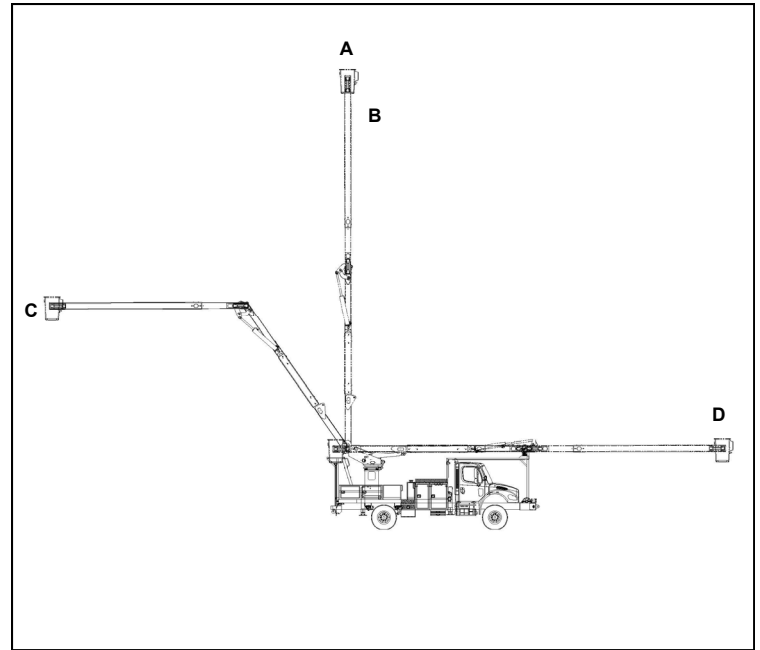

CAPACITIES AND DIMENSIONAL DATA (Based on a 40 Inch Frame Height)

	A	B	C	D	E	F
	Bottom of Platform Height	Working Height	Overcenter Side Reach	Non-Overcenter Side Reach	Upper Boom Articulation	Lower Boom Articulation
XT PRO 60	60.0 ft (18.3 m)	65.0 ft (19.8 m)	49.9 ft (15.2 m)	45.0 ft (13.7 m)	250°	125°
XT PRO 60/70*	70.0 ft (21.3 m)	75.0 ft (22.9 m)	49.9 ft (15.2 m)	45.0 ft (13.7 m)	250°	125°

* Includes Optional 10' Transverse Elevator

OPTIONAL EQUIPMENT

- Liner With or Without Steps
- Boom Storage Warning Light
- Start/Stop
- 2-Speed
- Auxiliary Let Down System
- Various Types of Outriggers
- 10' Transverse Elevator for Over-the-Rear Axle Units

Effective Date: February 2021. Product specifications and prices are subject to change without notice or obligation. The photographs and/or drawings in this document are for illustrative purposes only. Refer to the appropriate Operator's Manual for instructions on the proper use of this equipment. Failure to follow the appropriate Operator's Manual when using our equipment or to otherwise act irresponsibly may result in serious injury or death. The only warranty applicable to our equipment is the standard written warranty applicable to the particular product and sale and Terex makes no other warranty, express or implied. Products and services listed may be trademarks, service marks or trade-names of Terex Corporation and/or its subsidiaries in the USA and other countries. All rights are reserved. Terex® is a registered trademark of Terex Corporation in the USA and many other countries. Copyright 2021 Terex Corporation.