


520

CHANNEL FRAME CONVEYOR

PRODUCT OVERVIEW

The Marco 520 channel frame conveyor can be stacked three conveyors high for transport and can be deployed with an a-frame. Available in lengths of 40', 52', 60', 64' and 72', with a belt width of 30", the 520 conveyor is suitable to multiple applications. Marco 520 conveyors can achieve a maximum output of 500tph.

The 520 is designed to be seamlessly deployed with Marco 960 Portable Bins and are often used as concrete plant feeders or for other small to large scale industrial operations. Transportation is made easier with the 520 conveyors stacking on top of the 960 Portable Bins.

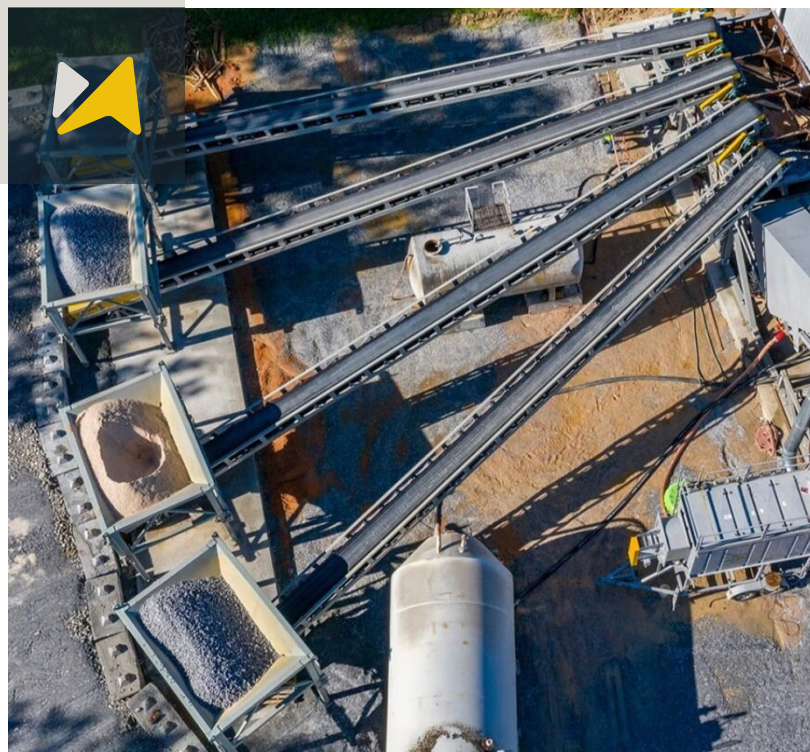

APPLICATIONS



**QUARRYING &
AGGREGATES**



**MATERIAL
TRANSPORT**



**CONCRETE
MANUFACTURING**





**MINING &
MINERALS**

TECHNICAL DATA SHEET


520
CHANNEL FRAME
CONVEYOR

WORKING DIMENSIONS- MIN 40FT


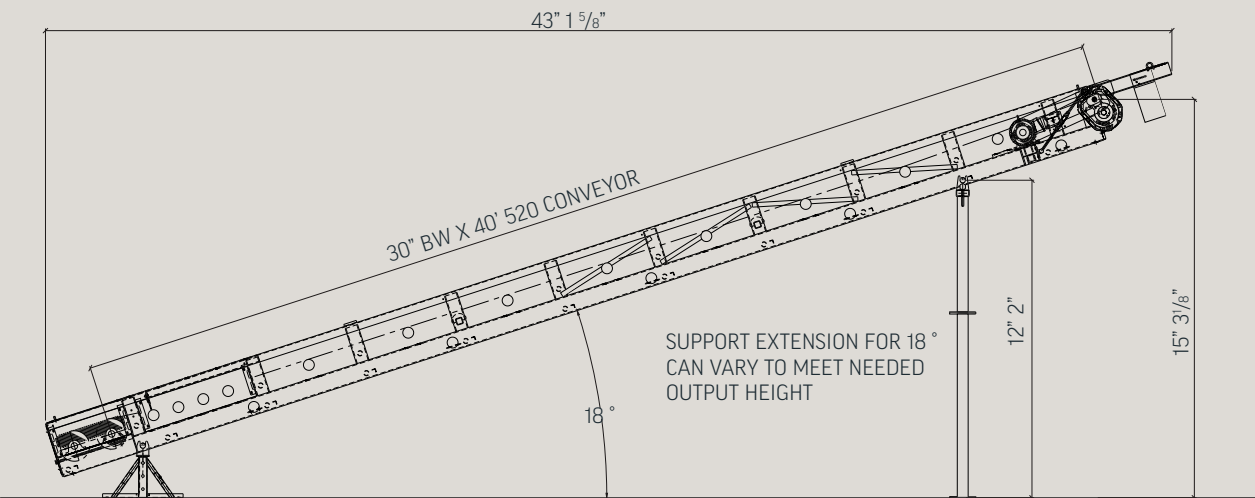
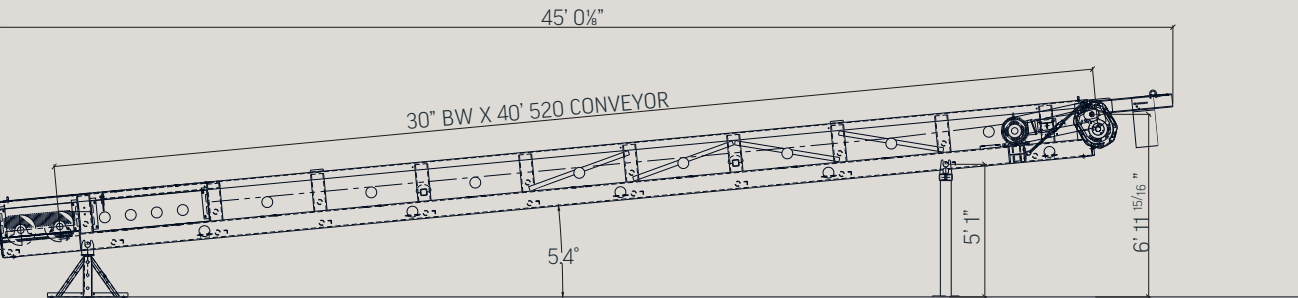


LINK CONVEYOR CONFIGURATION

212' 8 1/16" (APPROX)

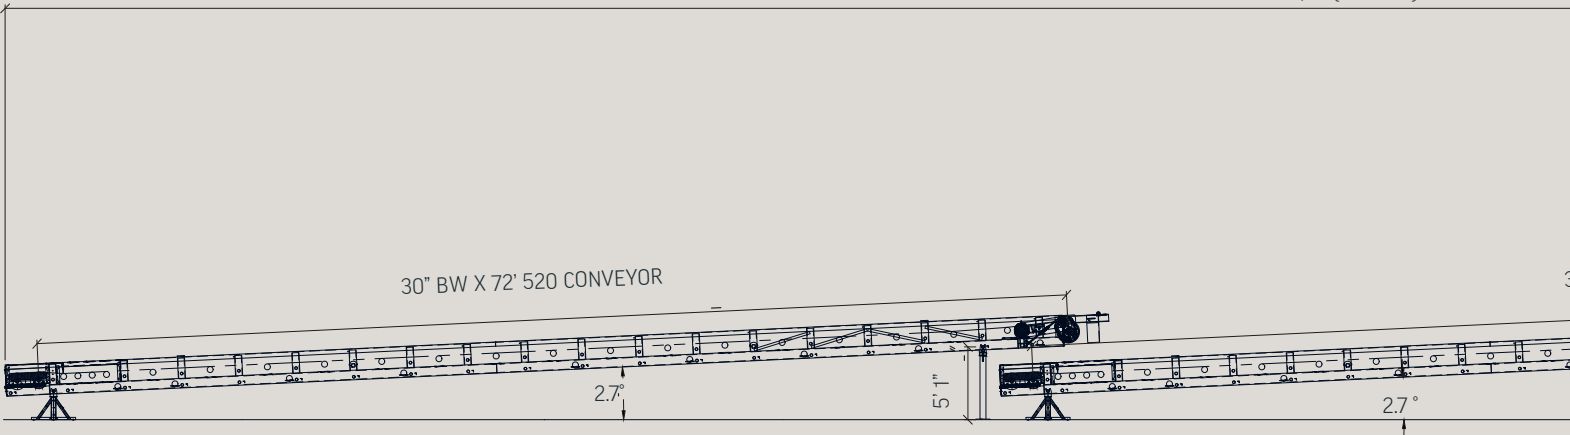

WORKING DIMENSIONS- MAX 72FT

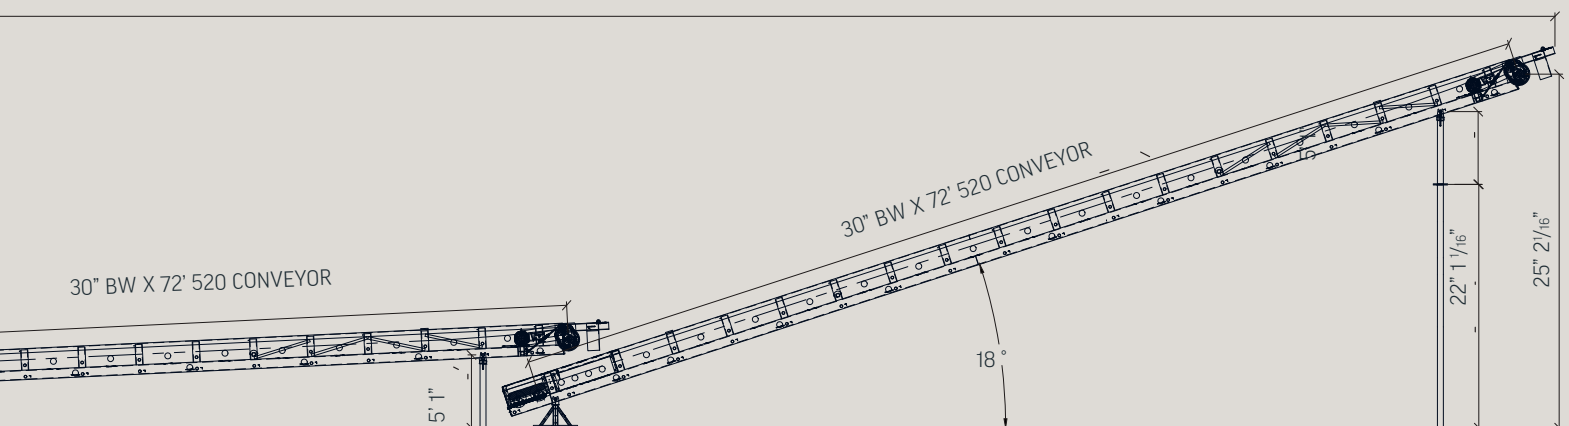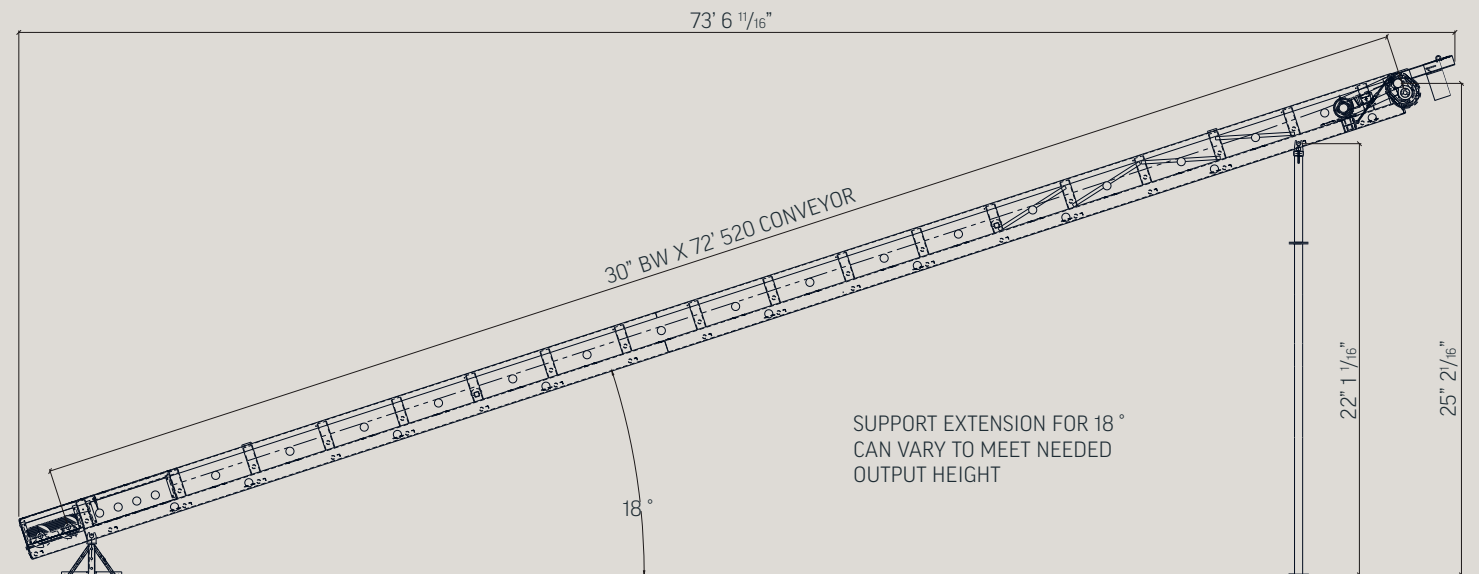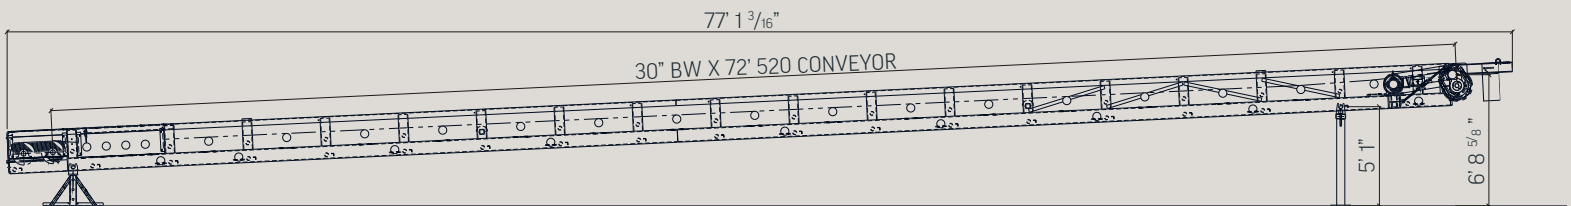



terex.com/marco

WARRANTY

At Marco, we stand behind the quality and craftsmanship of our products. Each Marco product comes with a comprehensive warranty designed to provide you with peace of mind. We are committed to ensuring your satisfaction with Marco products. If you have any questions or concerns regarding your warranty coverage, please don't hesitate to reach out to us.

Thank you for choosing Marco.

CONTACT US!

561 State Drive
Mt. Vernon, MO 65712
United States of America
(417) 466-2774
marco@terex.com