



MT15



TRACKED CONVEYOR

**TECHNICAL
SPECIFICATION**

MT15 TRACKED CONVEYOR



DIMENSIONS

Transport	Length	11.87 M (38'-11")
	Width	2.24 M (7'-4")
	Height	2.69 M (8'-10")
Working @24°	Length (Overall)	14.96 M (49'-1")
	Width	2.24 M (7'-4")
	Height (Top of Drum)	6.93 M (22'-9")
Total Weight (STD) (kg)		8,000
Maximum Tonnage		400-500 TPH <small>(DEPENDING ON MATERIAL AND BULK DENSITY)</small>
Maximum Feed Size		150 MM <small>(DEPENDING ON MATERIAL AND BULK DENSITY)</small>

GENERAL

- Full dog lead remote control
- Galvanised legs
- Check valve built into legs
- 2.5m heavy duty crawler track 400mm pads
- Optional engines



FEEDBOOT

Standard Capacity	1.3 M ³ (1.7 YD ³)
Extended Capacity	2.6 M ³ (3.4 YD ³)
Standard Feed In Width	1.73 M (5'-8")
Extended Feed In Width	1.73 M (5'-8")
Standard Minimum Feed In Height @24°	1.28 M (4'-2")
Extended Minimum Feed In Height @24°	1.28 M (4'-2")

CONVEYORS

Width	900 MM (36")
Belt Centres	15.24 M (50')
Belt Type (Plain/Chevron)	PLAIN <small>(CHEVRON OPTIONS)</small>
Belt Spec	EP 300 3PLY
Drive Drum Diameter	344 MM (14")
Tail Drum Diameter	275 MM (11")
Max Belt Speed of Conveyor	3 M/SEC
Motor Size & type	500CC
Operating Angle	0-24°
Variable Speed (Y/N)	YES

Discharge Height @ 10°	4.17 M (13'-8")
Stockpile Capacity @ 10° & 37° Angle of Repose	133.7 M ³ (175 YD ³)
Discharge Height @ 12°	4.58 M (15'-0")
Stockpile Capacity @ 12° & 37° Angle of Repose	177.2 M ³ (231.8 YD ³)
Discharge Height @ 14°	4.99 M (16'-5")
Stockpile Capacity @ 14° & 37° Angle of Repose	229 M ³ (300 YD ³)
Discharge Height @ 16°	5.39 M (17'-8")
Stockpile Capacity @ 16° & 37° Angle of Repose	288.8 M ³ (377.2 YD ³)
Discharge Height @ 18°	5.79 M (19'-0")
Stockpile Capacity @ 18° & 37° Angle of Repose	358 M ³ (468 YD ³)
Discharge Height @ 20°	6.19 M (20'-4")
Stockpile Capacity @ 20° & 37° Angle of Repose	437.4 M ³ (572 YD ³)
Discharge Height @ 22°	6.58 M (21'-7")
Stockpile Capacity @ 22° & 37° Angle of Repose	525.4 M ³ (687.2 YD ³)
Discharge Height @ 24°	6.93 M (22'-9")
Stockpile Capacity @ 24° & 37° Angle of Repose	613.8 M ³ (802.8 YD ³)



MT15 TRACKED CONVEYOR



MAIN CONVEYOR

- Heavy duty head and tail drums.
- Varied angle roller sets.
- Impact bars on tail section.
- Hydraulic folding head section.
- Full side skirting.

POWER UNIT & HYDRAULICS

T3 Engine

Engine Type and Power Rating	CAT 2.2 37KW
RPM	2800 RPM MAX
Crankshaft Pump	33cc
PTO Pump	None

T4F Engine

Engine Type and Power Rating	CAT 1.7 37KW Dual Cert
RPM	2800 RPM MAX
Crankshaft Pump	33cc
PTO Pump	None

Stage V Engine

Engine Type and Power Rating	CAT 1.7 37KW Dual Cert
RPM	2800 RPM MAX
Crankshaft Pump	33cc
PTO Pump	None

Tank Capacities

Diesel Tank Capacity	228 LT (60 US GALLON)
Hydraulic Tank Capacity	290 LT (77 US GALLON)



TRACKS

Shoe Width (mm)	400
Sprocket Centre (mm)	2490
Speed (KM/H) (Low)	1.6
Speed (KM/H) (High) / Or Single Speed	2.8

OPTIONS

- Electric drive
- Dual Power (Electric/Hydraulic/Diesel/Hydraulic)
- Heavy Duty 4 Ply Belt
- Chevron Belt C15
- Chevron Belt C25

- Front extensions for feed boot
- Rubber Lined Extended Feedboot 10mm
- Rubber Lined Extended Feedboot 35mm
- Hardox Lined Extended Feedboot 6mm

- Cordless Remote Control Tracks
- Under Guarding Cover (up to 8ft)
- Basket guards
- Manual Jacking Leg System
- Anti Roll Back Flaps (3 off)

CAT 2.8 55KW Dual Cert


Twin drive - 2 off OMV 400 motors - needs to have a larger engine

MT15 TRACKED CONVEYOR




TRANSPORT

Transport Container

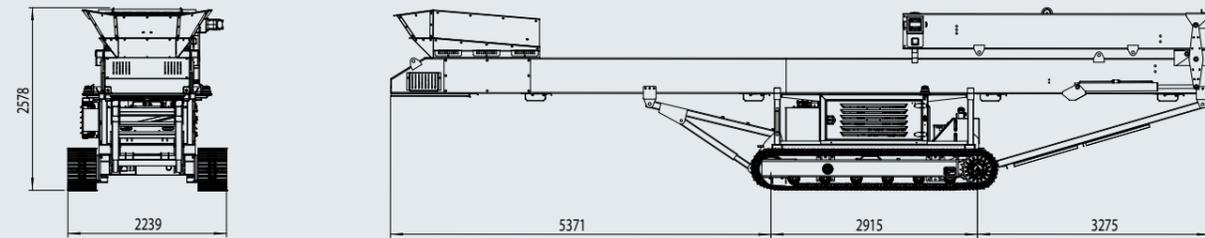


Transport Road

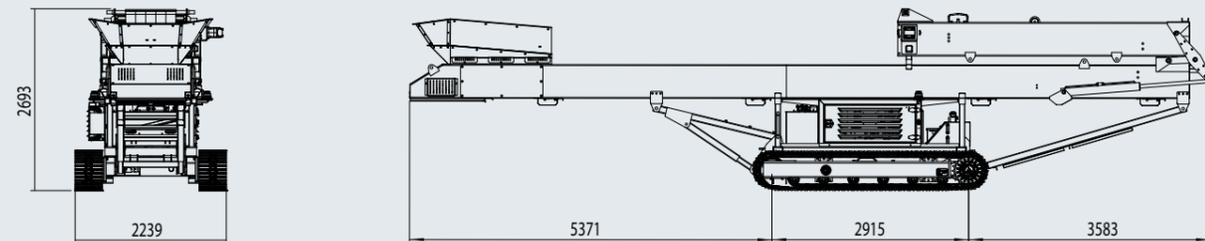


WORKING

Working 18°

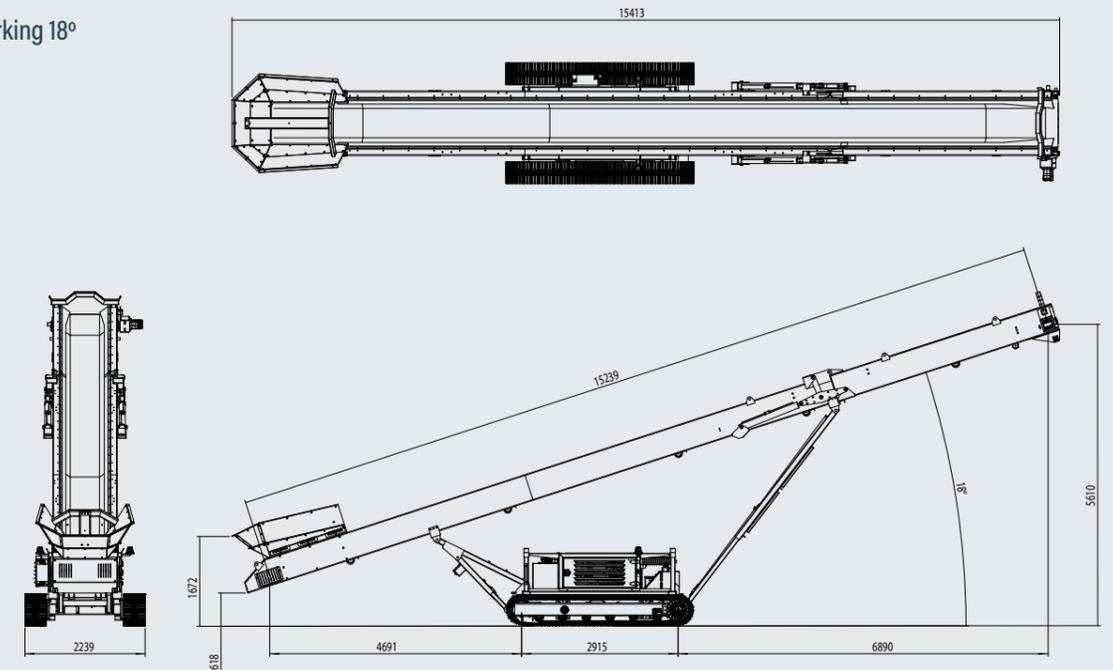

Working 24°

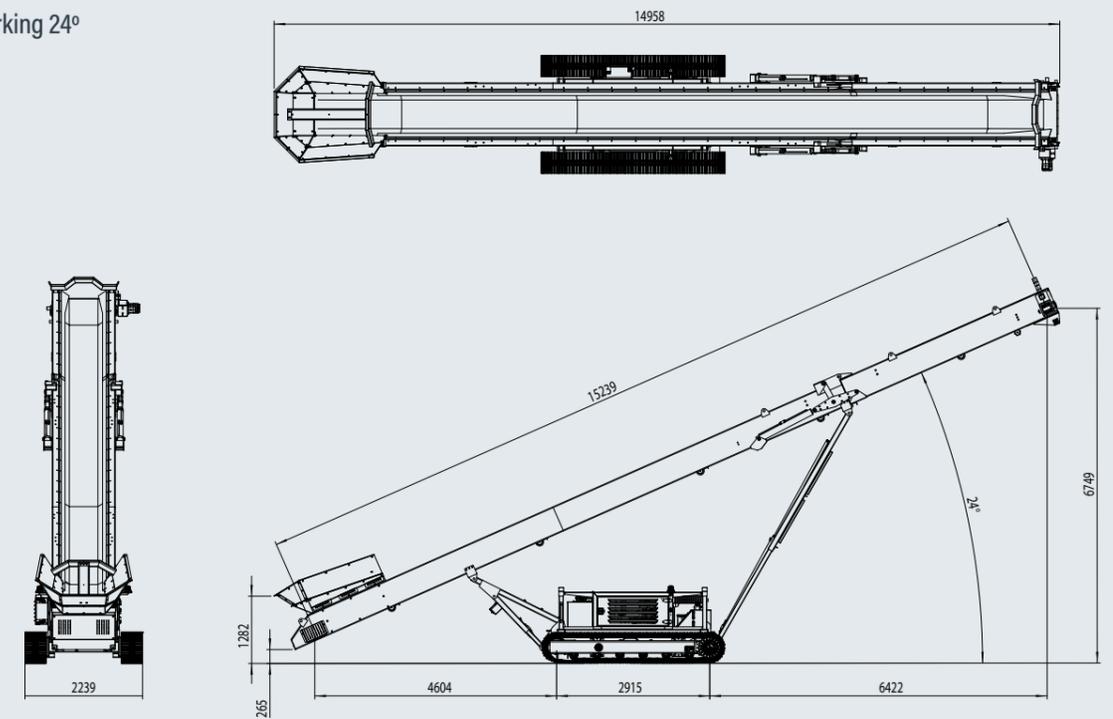



Scan the QR code
to visit our website

Ireland

Drummond, Magheracloone
A81 TE82, Carrickmacross
Co. Monaghan, Ireland
Tel: +353 42 966 7899
Email: mds.info@terex.com

USA

Louisville
11001 Electron Drive,
Louisville, Kentucky, 40299 USA
Tel: +1 502 736 5233
Email: mds.info@terex.com

www.terex.com/mds



The material in this document is for information only and is subject to change without notice. MDS assumes no liability resulting from errors or omissions in this document, or from the use of the information contained herein. Photographs are for illustrative purposes only; some or all of the machines in the illustrations may be fitted with optional extras. All machines are CE Approved.