

Specifications

Models	GR-26J	
Measurements	US	Metric
Working height*	31 ft 11 in	9.90 m
Platform height	25 ft 11 in	7.90 m
Horizontal reach maximum**	8 ft 3 in	2.51 m
Up-and-over clearance maximum	21 ft 10 in	6.70 m
A Platform length	2 ft 5 in	0.75 m
B Platform width	2 ft 11 in	0.90 m
Toeboard height	6 in	0.15 m
C Height - stowed	6 ft 6 in	1.99 m
D Length - stowed	9 ft 1 in	2.76 m
E Width	3 ft 8.8 in	1.14 m
F Wheelbase	3 ft 11 in	1.20 m
G Ground clearance - center	3.4 in	8.5 cm

Productivity


Maximum platform occupancy***	2	
Lift capacity	500 lbs	227 kg
Vertical jib rotation	140° (+70°/-70°)	
Turntable rotation	350° non-continuous	
Turntable tailswing	1 in	2.5 cm
Drive speed - stowed	2.8 mph	4.5 km/h
Drive speed - raised	0.4 mph	0.65 km/h
Gradeability****	25%	
Turning radius - inside	31 in	0.78 m
Turning radius - outside	92 in	2.30 m
Controls	24V DC proportional	
Drive	dual rear wheel	
Disc brakes	dual rear wheel	
Tires (solid non-marking)	16-5-11 ¼	40.5 cm diam.

Power


Power source	24 V DC (twelve 2 V batteries, 280 Ah capacity)	
Hydraulic system capacity	4.84 gal	22 L

Weight*****	6,250 lbs	2,835 kg
-------------	-----------	----------

Standards Compliance	ANSI A92.5, CSA B354.4	
----------------------	------------------------	--

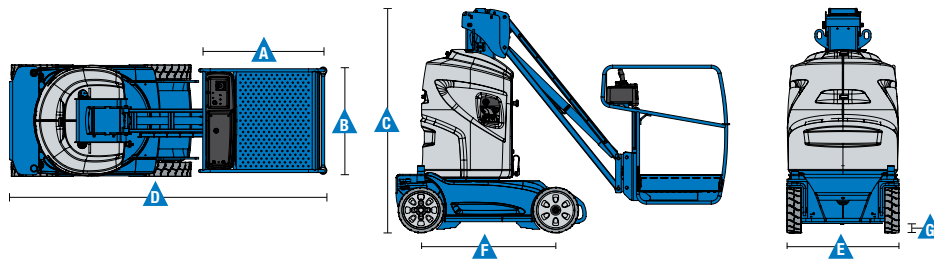

Range Of Motion GR-26J

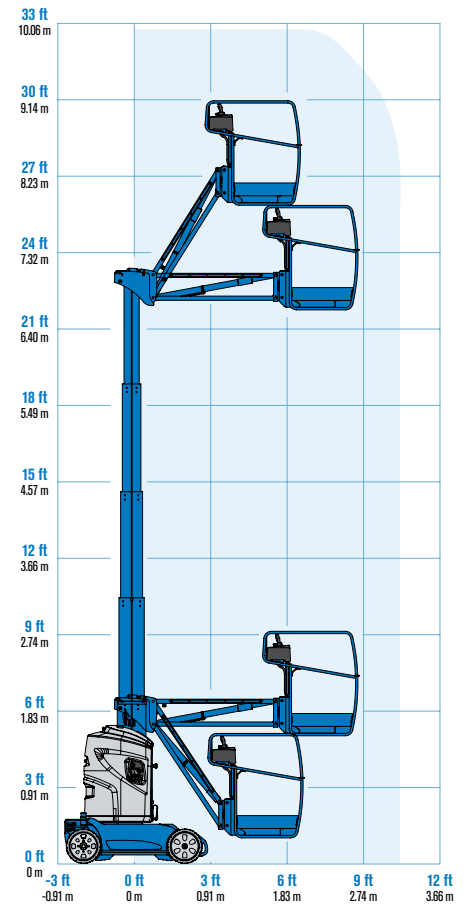

* The US equivalent of working height adds 6 ft to platform height.

** Non-working reach

*** ANSI/CSA maximum occupancy is 2 indoor and outdoor.

**** Gradeability applies to driving on slopes. See operator's manual for details regarding slope ratings.

***** Weight will vary depending on options and/or country standards.

Features

Standard Features

Measurements

GR-26J

- 31 ft 10 in (9.90 m) working height
- 8 ft 3 in (2.51 m) horizontal reach
- 21 ft 10.5 in up-and-over reach
- Up to 500 lbs (227 kg) lift capacity
- 4 ft 10 in (1.45 m) jib boom with 140° working range

Productivity

- Standard steel platform 2 ft 11 in x 2 ft 5.5 in (0.90 m x 0.75 m) with sliding midrail
- Hydraulic turntable rotation
- Fully proportional lift and drive system
- Drivable at full height
- Low 6 in (15 cm) platform entry height
- Rigid steel tube in hydraulic mast
- 44.8 in (1.14 m) compact width
- Low unit height of 6 ft 6 in (1.99 m)
- Low machine weight of 6,250 lbs (2,835 kg)
- Onboard diagnostic system
- AC power to platform
- Direct electric rear wheel drive with electric parking brake
- Front wheel steering
- Brake release switch
- Reinforced ABS chassis covers
- Tie down attachments points
- Overhead crane attachment points
- Non-marking solid tires
- Drive enable system
- Horn
- Hour meter
- Tilt level sensor with audible alarm
- Platform overload sensing
- Manual platform lowering valve
- Emergency stop at both platform and ground controls
- Motion alarm
- Flashing beacon

Standard Features

Power

- Automatic 30 Amp 24 V battery onboard charger
- 24 V DC (twelve 2V, 280 Ah traction batteries)
- Battery charge indicator



Genie United States

6464 185th Ave. NE
Redmond, WA 98052
Telephone +1 (425) 881-1800
Toll Free in USA/Canada +1 (800)-536-1800
Fax +1 (425) 883-3475

Distributed By: