PRODUCT
SPECIFICATION

A TEREX BRAND

CHIPMAX 364T
WHOLE TREE CHIPPER



WWW.TEREX.COM/CBI

CHIPMAX 364T
WHOLE TREE CHIPPER



CBI CHIPMAX
364T

ENGINEERED FOR MAXIMUM PRODUCTIVITY AND VERSATILITY

Built from the ground up with input from forestry and wood waste professionals, the ChipMax 364T is designed to excel in real-world applications.

The ChipMax 364T industrial wood chipper is built for durability, productivity, and versatility, delivering superior performance with a lower total cost of ownership. Available with either a 755hp or 550hp engine, it operates at peak efficiency, making it a powerhouse for any operation.

Designed for maximum output, its improved chute geometry enhances chip throw for efficient trailer packing, while a standard chip accelerator optimizes performance across various chip sizes. The service platform next to the engine provides a convenient workspace for routine maintenance.

With two rotor options, the 364T gives operators the flexibility to produce anything from consistent micro-chips to larger 30mm chips, adapting to market demands. CBI's innovative rotor design enables quick swaps, allowing for easy adjustments to chip sizes and seamless adaptation to diverse end markets.


CHIPMAX 364T
WHOLE TREE CHIPPER

KEY FEATURES:

POWERED BY EITHER A 755HP OR 550HP ENGINE, THE CHIPMAX 364T OPERATES AT PEAK EFFICIENCY.

SERVICE PLATFORM FOR OIL CHECKS AND ROUTINE UPKEEP.

OFFERING TWO ROTOR OPTIONS, THE 364T LETS OPERATORS PRODUCE ANYTHING FROM CONSISTENT MICRO-CHIPS TO LARGER 30MM CHIPS, ADAPTABLE TO MARKET DEMANDS.

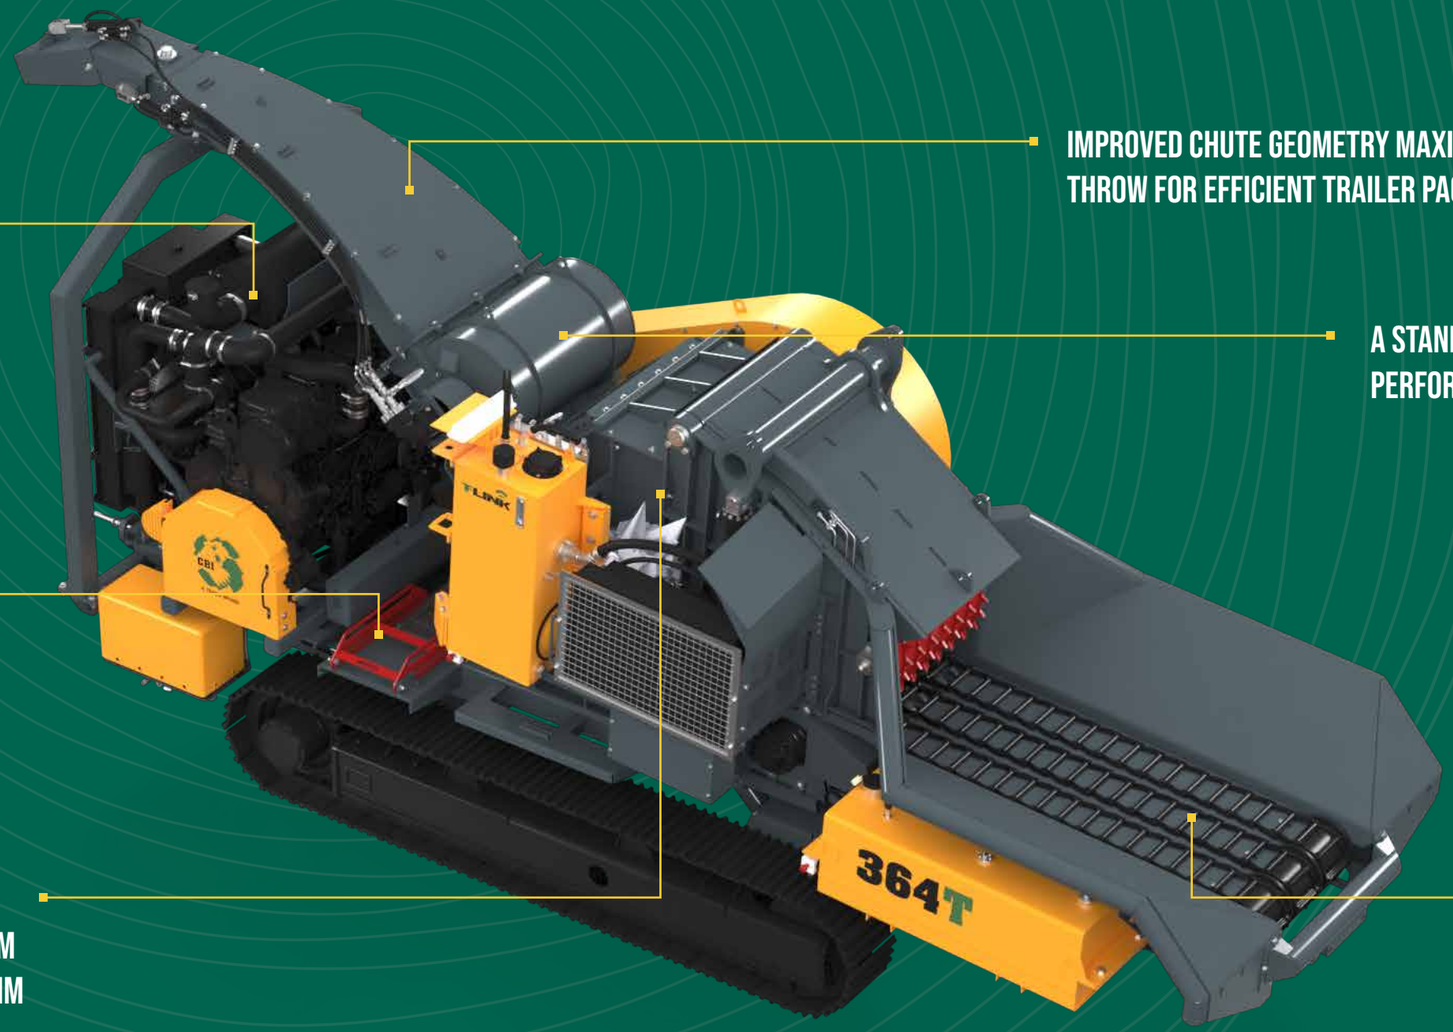

IMPROVED CHUTE GEOMETRY MAXIMIZES CHIP THROW FOR EFFICIENT TRAILER PACKING.

A STANDARD CHIP ACCELERATOR OPTIMIZES PERFORMANCE ACROSS VARIOUS CHIP SIZES.



INFEED DESIGNED WITH 5” PITCH CHAIN. BOTTOM FEED ROLL HELPS GUIDE MATERIAL TO THE ROTOR.

APPLICATIONS


- LAND CLEARING
- BIOMASS PRODUCTION
- PULP AND PAPER
- FORESTRY & WOOD PROCESSING
- MULCH AND LANDSCAPE


CHIPMAX 364T
WHOLE TREE CHIPPER

TECHNICAL DATA

TRANSPORT DIMENSIONS	
Width	8’-4” (2,438mm)
Height	12’ (3,657mm)
Length	27’-1” (8,229mm)
Weight	54,000lbs
WORKING DIMENSIONS	
Width	8’-4” (2,438mm)
Height	12’ (3,657mm)
Length	27’-1” (8,229mm)
Discharge Height	12’ (3,657mm)
INFEED	
Top Feed Roll	26” (685mm)
Width	36” (914mm)
Length	8’ (2,438mm)

POWERTRAIN	
Power Unit	Scania DC13, Tier IV Final/Stage V, 550 HP Scania DC16, Tier IV Final/Stage V, 770HP CAT C18, Tier IV Final, 755HP
Hydraulics	Open Loop
Fuel Tank	Dual 105 Gallon Tanks
GENERAL	
Controls	Parker IQAN
Tracks	Strickland, 400mm
Rotor	48”D x 36”W
Options	Work Lights Compressor Bottom Feed Roll 550-755hp Options Tier 2, Tier 4 Final, Stage V Engines

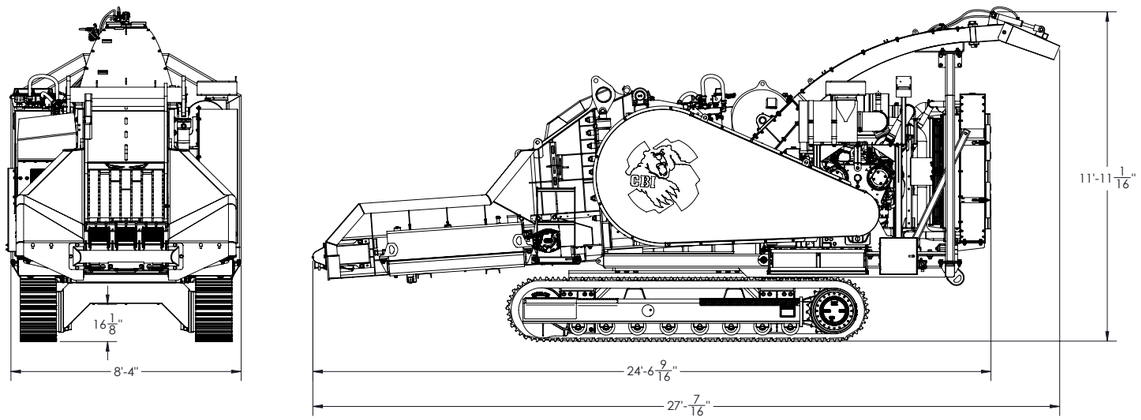

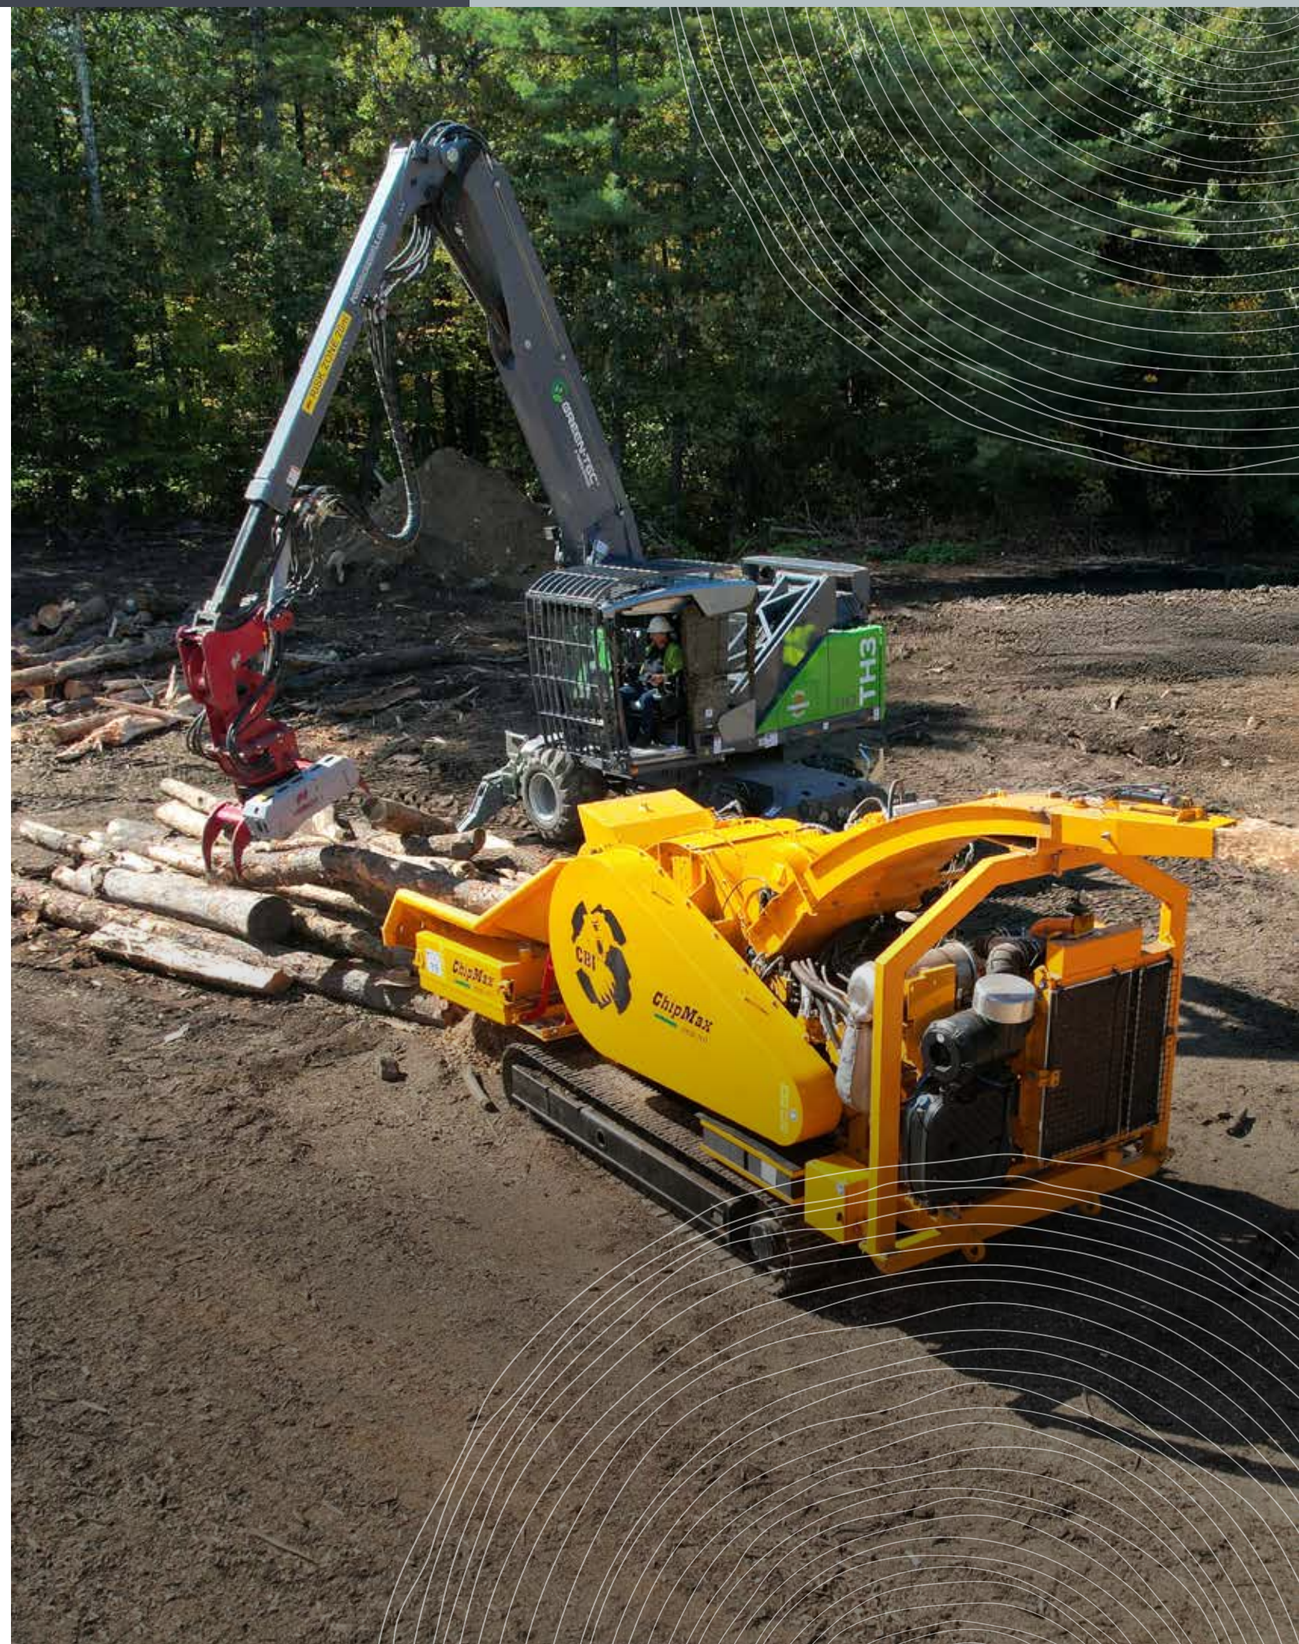

A TEREX BRAND

The material in this document is for information only and is subject to change without notice.

CBI assumes no liability resulting from errors or omissions in this document, or from the use of the information contained herein. Due to continual product development we reserve the right to change specifications without notice. Product performance figures given in this brochure are for guidance purposes only, this information does not constitute an expressed or implied warranty or guarantee. Results will vary depending on conveyor settings, feed source and types of material being processed.

Images are for illustrative purposes only, some or all of the machines in the illustrations may be fitted with optional extras.
Please check with your Dealer for details on optional extras.

CBI is a registered trademark of Terex GB Limited in the United States of America and many other countries.
Copyright 2026 Terex. Published and Printed in 2026.