

TIPS & SCREENS



2" FANG TIP

Description: Aggressive for high throughput. Ideal for first grind and general volume reduction.

Application: Primary Grind



3" FANG TIP

Description: All-purpose tip for all varieties of materials and applications. Best overall wear life.

Application: Primary & Regrind



3" TALL TIP

Description: Closest tolerance to screens for maximum throughput in regrind and asphalt shingles.

Application: Regrind



SPADE TIP

Description: Cuts fibrous materials and prevents rotor jamming. Works with 2" and maul tips.

Application: Primary Grind



MAUL TIP


Description: Used with 2" tips for maximum throughput in primary grinds. Ideal for logs & stumps.

Application: Primary Grind

UPSWING GRINDER TIP & SCREEN GUIDE

CBI Horizontal Grinders give owners the greatest level of customization freedom in the industry. Tips, screens, and unrestricted controls can be tailored to an exact balance of maximum production and precise final product sizes. Below is a recommended tip and screen application guide for CBI Upswing Horizontal Grinders. Ask a CBI Technical Trainer how to optimize your operation for the highest level of efficiency.

Check marks indicate recommended usage. Subject to change based on material condition and other factors.								Grinders. Ask a CBI Technical Trainer how to optimize your operation for the highest level of efficiency.						
SCREENS	TIPS	LOGS	C&D	COMPOST	MSW	BRUSH	PALLETS	STUMPS	TELEPHONE POLES	GREEN WASTE	CLEAN RAILROAD TIES	CLEAN DIMENSIONAL LUMBER	CLEAN WOOD REGRIND	ASPHALT SHINGLE REGRIND
6" x 9"	2" FANG TIP	\checkmark				\checkmark	√	\checkmark	√	\checkmark	√	√		
	3" FANG TIP		\checkmark	√	√	√	√	√	√	\checkmark	√	√		
	3" TALL TIP													
	MAUL TIP	\checkmark						√	√		√	√		
	SPADE TIP	\checkmark												
4" x 6"	2" FANG TIP	√				√	√	√	√	√	√	√		
	3" FANG TIP	√	√	√	√	√	√	√	√	√	√	√		
	3" TALL TIP	\checkmark												
	MAUL TIP	√						√	√		√	√		
	SPADE TIP	√												
3" x 5"	2" FANG TIP	√				√	√	√	√	√	√	√		
	3" FANG TIP	\checkmark	√	√	\checkmark	√	√	√	√	√	√	√		
	3" TALL TIP									√				
	MAUL TIP	\checkmark						\checkmark	√		√	√		
	SPADE TIP	\checkmark												
2" x 4"	2" FANG TIP	\checkmark				\checkmark	√		√		√			
	3" FANG TIP	\checkmark		√	\checkmark	√	√		√	√	√		√	
	3" TALL TIP			✓	\checkmark		√			✓			√	
	MAUL TIP	✓												
	SPADE TIP	✓												
1.5" X 3"	2" FANG TIP													
	3" FANG TIP			√	✓		√			√			√	√
	3" TALL TIP			\checkmark	\checkmark		\checkmark			\checkmark			✓	\checkmark
	MAUL TIP													
	SPADE TIP													
1" x 2"	2" FANG TIP													
	3" FANG TIP			√	\checkmark		\checkmark			\checkmark			√	\checkmark
	3" TALL TIP			√	√		√			\checkmark			√	✓
	MAUL TIP													
\	SPADE TIP													
THE RESERVE AND ADDRESS OF THE PARTY AND ADDRE	A STATE OF THE PARTY OF THE PAR	AND DESCRIPTION OF PERSONS ASSESSMENT	STREET, SQUARE,	THE RESERVE AND ADDRESS OF THE PERSON NAMED IN	COLUMN LAND WITH	ALTO MANAGEMENT AND ADDRESS.	THE RESERVE OF THE PARTY OF THE	- 1 To 1 T	THE RESERVE OF THE PARTY OF THE	ALTERNATION & To JAMES	OT REAL PROPERTY. No. To. Co. Co. Co.	A STATE OF THE PARTY OF THE PAR	THE RESERVE AND ADDRESS OF THE PARTY OF THE	10.00

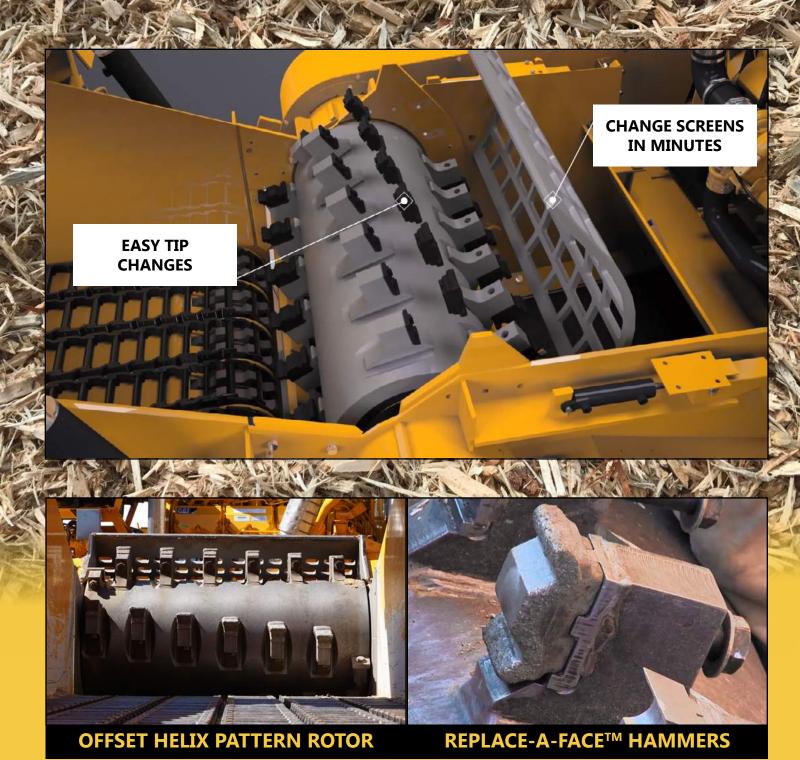

CBI's upturn rotors have a forged, thick, high-strength core with 24 weld-on hammers. The offset helix pattern cuts the full width of the rotor, distributing material across the hammers for a natural efficiency. This design increases throughput over conventional, pinned, or welded hammer rotors

used by our competitors. CBI's bolt-on reversible tips grind more material for less cost than any other tip. Our Replace-A-Face™ hammer system allows the end user to swap out the face independent of the rest of the hammer for quick, easy, and inexpensive maintenance.



World's best stationary and portable material recovery systems. 22 Whittier Street, Newton, New Hampshire, 03858 PHONE: (603) 382-0556 FAX: (603) 382-0557

WEB: www.terex.com/cbi E-mail: NWT.InfoFWD@terex.com

CONTINENTAL BIOMASS INDUSTRIES

July 2019. The material in this document is for information only and is subject to change without notice. CBI assumes no liability resulting from errors or omissions in this document, or from the use of the information contained herein. Due to continual product development we reserve the right to change specifications without notice. Any product performance figures given in this brochure are for guidance purposes only. This information does not constitute an expressed or implied warranty or guarantee, but shows text examples provided. Photographs are for illustrative purposes only. Some or all of the machines in the illustrations may be fitted with options. Products and services listed may be trademarks, service marks, or trade names of Terex Corporation and/or its subsidiaries in the USA and other countries. The CBI logo is a registered trademark. All rights reserved.