

Product Portfolio


FUCHS MATERIAL HANDLERS



FUCHS[®]

A TEREX BRAND

MHL

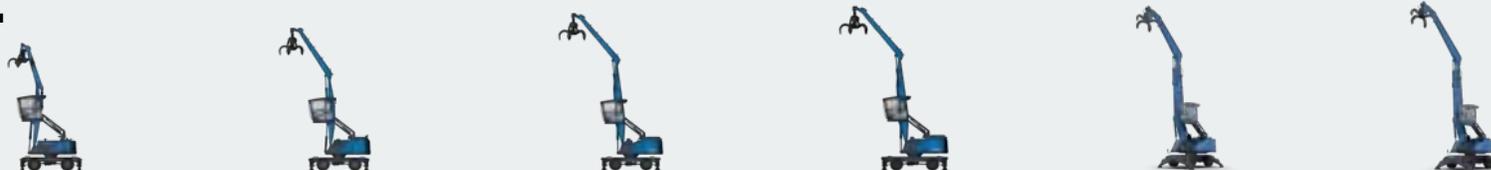

MHL310 MHL320 MODULAR+ MHL331 MHL335 MHL340G MHL345G

	114 hp	127 hp	154 hp	154 hp	173 hp	173 hp
	-	127 hp	154 hp	154 hp	173 hp	173 hp
	75 kW	75 kW	90 kW	90 kW	110 kW	110 kW
	37,699 lbs	46,297 lbs	53,351 lbs	56,217 lbs	70,548 lbs	75,178 lbs
	29'6"	34'1"	39'4"	39'4"	45'11"	45'11"



MHL350G MHL360 MHL370 MHL375 MHL380 MHL390

	215 hp	255 hp	308 hp	328 hp	328 hp	402 hp
	215 hp	250 hp	308 hp	328 hp	328 hp	366 hp
	132 kW	160 kW	200 kW	220 kW	220 kW	250 kW
	78,925 lbs	107,585 lbs	114,640 lbs	146,607 lbs	158,292 lbs	191,802 lbs
	55'9"	59'1"	65'7"	65'7"	72'2"	80'5"



Key



Engine power
EU Stage V/ U.S. Tier 4



Engine power
EU Stage IIIA/ U.S. Tier 3



Electric motor



Max. service weight
without attachments



Max. reach

TIMBER & FORESTRY



MHL 420 MHL 434 MHL 364 MHL 450

	127 hp	154 hp	255 hp	241 hp
	-	154 hp	249 hp	-
	48,281 lbs	56,659 lbs	76,941 lbs	106,042 lbs
	41'12"	35'1"	37'1"	39'8"


BATTERY+



MHL 820 BATTERY+ MHL 840 BATTERY+

	-	-
	-	-
	75 kW	110 kW
	46,297 lbs	70,107 lbs
	34'1"	45'11"

FQC

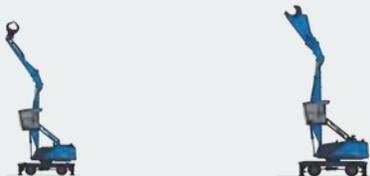

FQC 340 G* FQC 350 G*

	173 hp	215 hp
	173 hp	215 hp
	110 kW	132 kW
	70,548 lbs**	78,925 lbs**
	37'1"	42'12"



* More FQC models upon request.

** Basic machine (with stick head and without attachment)





Key



Engine power
EU Stage V/ U.S. Tier 4



Engine power
EU Stage IIIA/ U.S. Tier 3



Electric motor




Max. service weight
without attachments



Max. reach

RHL

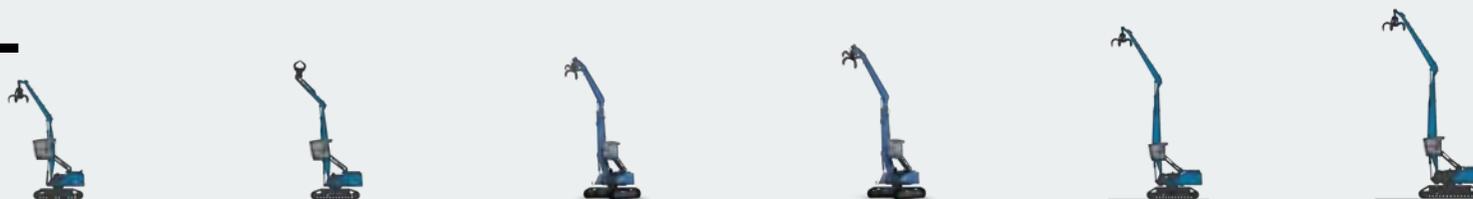

RHL 320 MODULAR+ **RHL 331** **RHL 340G** **RHL 350G** **RHL 360** **RHL 370**

	127 hp	154 hp	173 hp	215 hp	255 hp	308 hp
	127 hp	154 hp	173 hp	215 hp	250 hp	308 hp
	75 kW	90 kW	110 kW	132 kW	160 kW	200 kW
	62,832 lbs	63,934 lbs	86,862 lbs	94,799 lbs	119,050 lbs	121,254 lbs
	34'1"	39'4"	45'11"	55'9"	59'1"	65'7"



RHL 380 **RHL 390** **RHL 390 GANTRY** **F120MH**

	328 hp	402 hp	402 hp	469 hp + 150kW*
	328 hp	366 hp	366 hp	469 hp + 150kW*
	220 kW	250 kW	250 kW	280 kW + 150kW*
	169,756 lbs	231,485 lbs	242,508 lbs	330,693 lbs
	72'2"	80'5"	80'5"	91'10"

*** FUCHS BLUE HYBRID SYSTEM**
MAXIMUM ENERGY EFFICIENCY

AHL



* More AHL models upon request

	AHL 350 G PYLON*	AHL 350 G STANDARD*
	215 hp	215 hp
	215 hp	215 hp
	132 kW	132 kW
	56,218 lbs	78,264 lbs
	55'9"	55'9"

SCRAP MASTER



SWS 400

Total Weight	49,604 lbs		
Transport Dimensions	L: 56'8"	H: 9'10"	W: 8'2"
Engine Power	EU Stage V: 74 hp		

PYLON

	MHL 360 PYLON (2'7")	MHL 365 PYLON (4'7")
	255 hp	255 hp
	249 hp	249 hp
	160 kW	160 kW
	110,452 lbs	122,356 lbs
	59'1"	59'1"



PYLON-MOUNTED MACHINES

As an option every Fuchs machine can be equipped with a pylon.



MHL360
Pylon (2'7")



MHL365
Pylon (4'7")



**ALL MODELS AVAILABLE WITH
CRAWLER UNDERCARRIAGE AND
PYLON ON DEMAND.**

* Fuchs Blue Hybrid System



MHL350G MHL360 MHL370 MHL375 MHL380 MHL390 F120MH

	215 hp	255 hp	308 hp	328 hp	328 hp	402 hp	469 hp + 150kW*
	215 hp	250 hp	308 hp	328 hp	328 hp	366 hp	469 hp + 150kW*
	132 kW	160 kW	200 kW	220 kW	220 kW	250 kW	280 kW + 150kW*
	78,925 lbs	107,585 lbs	114,640 lbs	146,607 lbs	158,292 lbs	191,802 lbs	330,693 lbs
	55'9"	59'1"	65'7"	65'7"	72'2"	80'5"	91'10"



Key



Engine power
EU Stage V/ U.S. Tier 4



Engine power
EU Stage IIIA/ U.S. Tier 3



Electric motor



Max. service weight
without attachments



Max. reach

TELESCOPIC CONVEYOR



	TCW 42 140 FT	TCW 52 170 FT	TCW 58 190 FT
Conveyor length	140'	170'	190'
Max. discharge height (Extended)	47'	59'11"	63'9"
Min. Discharge Height (Extended)	22'11"	35'11"	39'4"
Chassis Length (Kingpin to Swing Axle)	60'2"	73'8"	73'9"
Max. Reach (Kingpin to Discharge point)	130'10"	155'9"	175'8"
Feed In Height	9'1"	11'5"	12'7"
Operational Angle Range (Degrees)	8 °–18 °	8 °–18 °	8 °–18 °
Operational Width	22'4"	34'5"	34'5"

FEEDER



	RF 22
Conveyor length	56'
Belt width	72"
Min. Discharge height	11'6" @ 15°
Max. discharge height	15'3" @ 21°
Production capacity	1650 STPH @ 1600 kg/m ³



	MF 24 HIGH LEVEL	MF 24 LOW LEVEL
Conveyor length	73'10"	73'10"
Feeder length	13'11"	13'11"
Belt width	48"	4'3"
Discharge height	26'3" @ 18°	26'3" @ 18°
Max. discharge height	32'2" @ 24°	32'2" @ 24°
Production capacity	Up to 661 US TPH	Up to 661 US TPH



MODULAR SYSTEM

ENDLESS POSSIBILITIES.
MAXIMUM PERFORMANCE.
YOUR FUCHS.

ATTACHMENTS



Cactus grab



Timber grapple



Clamshell grab



Load hook



Magnet plate



Sorting grapple



WORK EQUIPMENT



Straight



Banana Boom



FQC
Fuchs®
QuickConnect



Universal stick



UNDERCARRIAGES




Standard-undercarriage





Standard-undercarriage with Pylon



Crawler

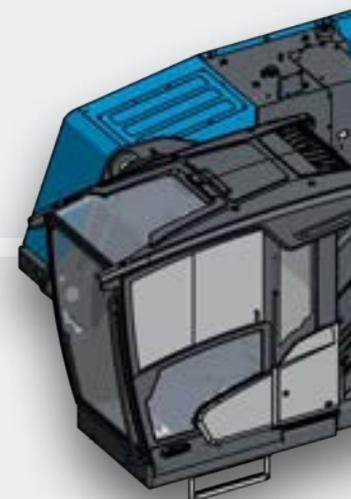

CAB SYSTEMS

  <p>Vertically adjustable</p>	  <p>Vertically and horizontally adjustable (Available from MHL360)</p>	  <p>Hydraulically adjustable cabin "Port": viewing height: 28'10" (Available for MHL390)</p>
--	---	---

WORK EQUIPMENT

  <p>Diesel engine</p>	  <p>Electric motor</p>
--	---

OPTIONS

  <p>Cable reel</p>	  <p>Cable drum</p>
---	---

+



Crawler with Pylon



Gantry



AHL Standard-undercarriage with Pylon



AHL Pylon




**Let's
handle
it!**

MATERIAL HANDLERS: SPECIALLY DESIGNED FOR YOUR INDUSTRY

PORT HAFEN




SCRAP SCHROTT

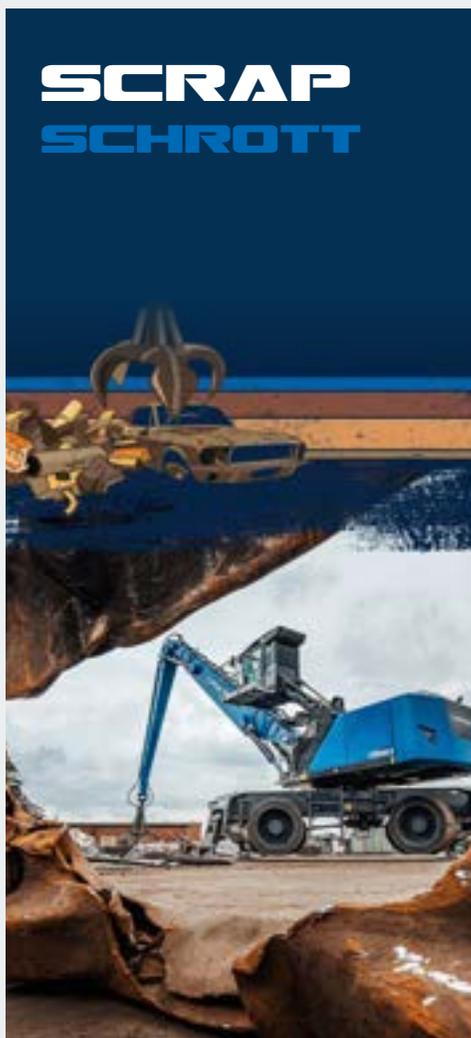

TIMBER HOLZ



WASTE RECYCLING

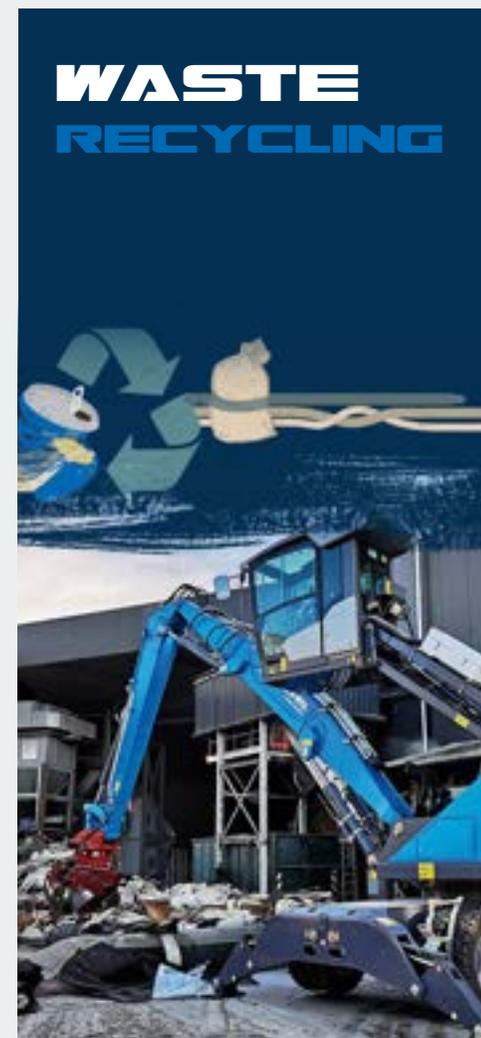



www.terex.com/fuchs

January 2026. Product specifications and prices are subject to change without notice or obligation. The photographs and/or drawings in this document are for illustrative purposes only. Refer to the appropriate Operator's Manual for instructions on the proper use of this equipment. Failure to follow the appropriate Operator's Manual when using our equipment or to otherwise act irresponsibly may result in serious injury or death. The only warranty applicable to our equipment is the standard written warranty applicable to the particular product and sale and Terex makes no other warranty, express or implied. © Terex Corporation 2026 - Terex, the Terex Crown design, Fuchs and Works For You are trademarks of Terex Corporation or its subsidiaries.

Terex® Deutschland GmbH | Industriestraße 3 | 76669 Bad Schönborn | Germany | Fon: +49 (0) 7253 84-0 | Fax: +49 (0) 7253 84-102 | info@terex-fuchs.com

