



FUCHS[®]
A TEREX BRAND

**TECHNICAL
SPECIFICATION**



SWS 400

SWS 400

SUPERIOR SCRAP PROCESSING

The FUCHS SWS 400 track rotary screener is designed specifically for the scrap and metal recycling industry, offering a solution to long-standing challenges in processing efficiently. With its robust construction and advanced features, this machine is built to handle tasks that have traditionally been difficult for conventional equipment.

The SWS 400 is tailored for heavy-duty scrap processing, addressing a key gap in the market where standard recycling trommels and scalpers often fall short. It is equipped with a wear-resistant push feeder, capable of withstanding the abrasive nature of scrap materials, and a durable drum frame that supports a variety of screen sizes, ranging from 25mm to 150mm (1” to 6”). Additionally, it features an apron-style conveyor for handling oversized material and a heavy-duty three-ply fines belt, ensuring long-lasting performance in demanding environments.

With auto-reverse functionality and adjustable drum rotation speeds, the SWS 400 is designed for maximum efficiency and reliability, making it the ideal solution for businesses in the scrap and metal recycling industry seeking a machine that can handle the toughest materials with ease.

SWS 400

OVERVIEW	
Engine Power	EU Stage V 55kW (74hp)
Transport Dimensions	Length 17,275mm (56' 8")
	Height 3,000mm (9' 10")
	Width 2,500mm (8' 2")
Total Weight	22,500kg (49,500lbs)



SPECIFICATIONS

HOOPER

Hopper Capacity	4m ³ (5.23 cu. yards)
Feeder Width	1m (3' 4")
Feeder Length	3.15m (10' 4")
Feeder Type	Heavy duty Reciprocating Pan Feeder
Drive	Hydraulic variable Speed via Hydraulic Cylinder
Speed	Variable, 1-8 Strokes Per Minute
Wear	Resistant Feeder Floor

FINES CONVEYOR


Belt Width	1000mm (3' 3")
Belt Spec	EP500/3 5+1.5
Discharge Height	3550mm (11'8")
Working Angle	16°
Speed	112 m/min
Drive	Heavy Duty Hydraulic Motor
Max Rock Size	150mm (6")

OVERSIZE CONVEYOR

Belt Width	1000mm (3' 3")
Belt Spec	Heavy duty damage resistant apron style conveyor
Discharge Height	3100mm (10'2")
Working Angle	18°
Speed	40M/min
Drive	Single Heavy Duty Motor Gearbox Drive
Max Rock Size	600mm (24")

TROMMEL DRUM

Drum Diameter	1.25m (4'1")
Drum Length	4.6m (15'1")
Incline Angle	5°
Drive Type	Chain driven
Drive Motor	Hi Torque Motor and Gearbox Combination Max Torque - 4000NM
Speed	Variable up to 14RPM

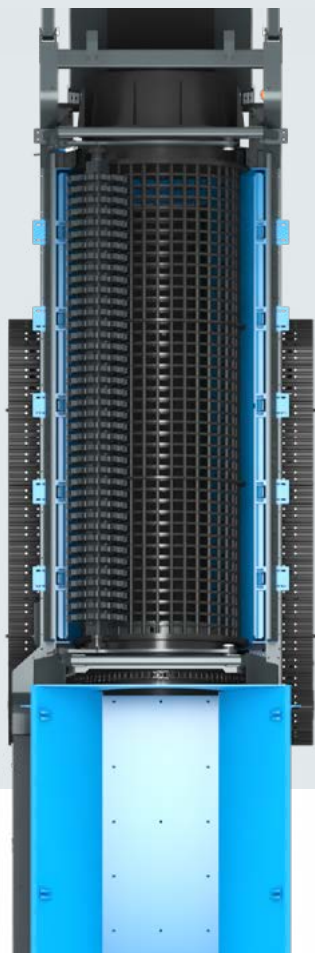

SPECIFICATIONS

POWER UNIT/HYDRAULICS

Tier 4 F Stage 5 Dual Cert - CAT 2.2	
Engine Power	55kW (74HP)
Engine Speed	2500RPM
Feeder/Drum/Tracks	Gear Pumps (Max Pressure 210 Bar)
Conveyors	Gear Pumps (Max Pressure 210 Bar)

DRUM OPTIONS

Fully Welded Drum	75mm (3") - 150mm (6")
Heavy Duty Changeable Screens	25mm (1") - 150mm (6")

UNDERCARRIAGE

Hopper Deflector Plates
Grade 68 Hot Climate Oil
Wireless Remote Control
Hopper Extensions

CONTROL PANEL

Protection	Dust and Weatherproof to IP55
Switches	Ignition Key Switch, Emergency Stop
User-Friendly Operator Interface	
Intelligent Machine Control to Prevent Blockages	

CHASSIS

Main Chassis	Web and Flange Chassis, Monocoque Design
Safety Guarding	To Relevant ISO standards
Low-Level Greasing Points	

TANK CAPACITIES

Fuel Tank	170 Litres (44 US Gallons)
Hydraulic Tank	200 Litres (53 US Gallons)


UNDERCARRIAGE

Length Centres	2.8m (9'2")
Gauge Centres	2.19m (6'10")
Flow Per Track (L/Min)	70
Pressure (Bar)	210
System Type	Open Loop
Shoe Width	500mm (17")



DRUMS & SCREENS

The SWS 400 drums can come in two configurations. Customers have the option of a drum frame with changeable screens or a fully welded drum. Drum cleaners only work with fully welded drums. Fully Welded options are **75mm (3")**, **100mm (4")**, **125mm (5")** and **150mm (6")**. Drum frame with changeable screens is recommended for free-flowing or abrasive applications.



1" (25mm)
1.5" (38mm)
2" (50mm)



3" (75mm)
4" (100mm)
5" (125mm)



6" (150mm)




Drum Frame with Screens
4m drum frame with screens
Various screen sizes
Easily changeable screens

3D / Titled screens are available in various sizes




DIMENSIONS SWS 400

WORKING DIMENSIONS WITHOUT CHASSIS RISER

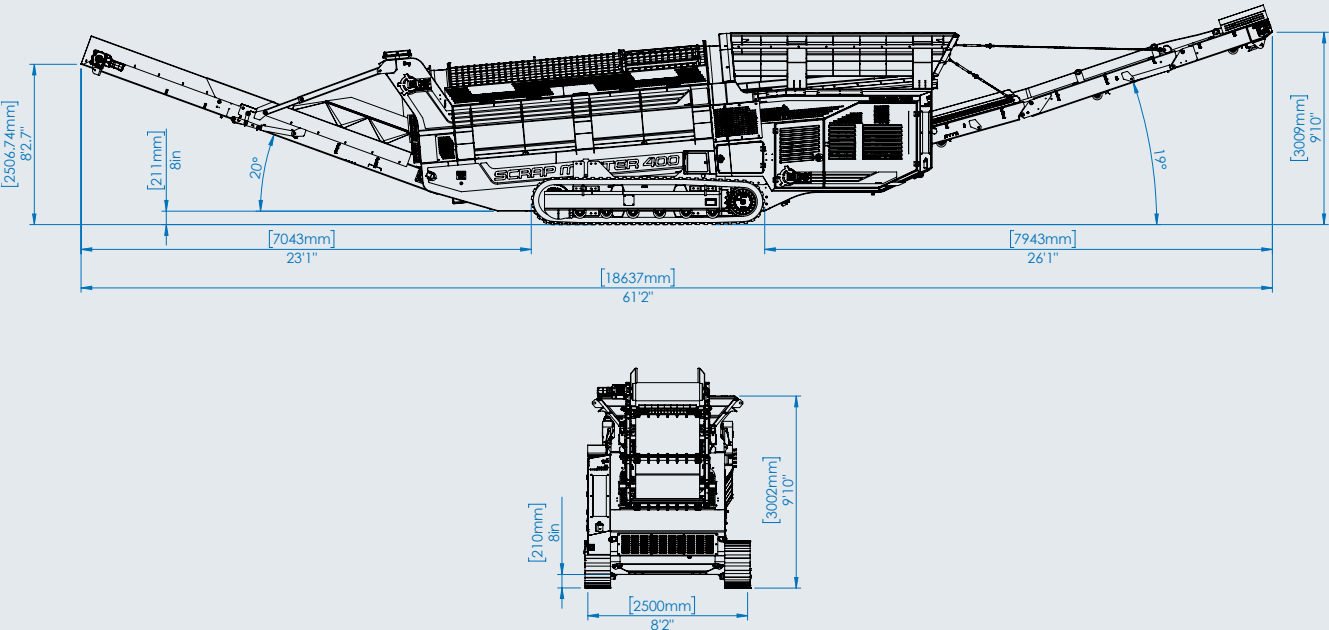


WITH CHASSIS RISER

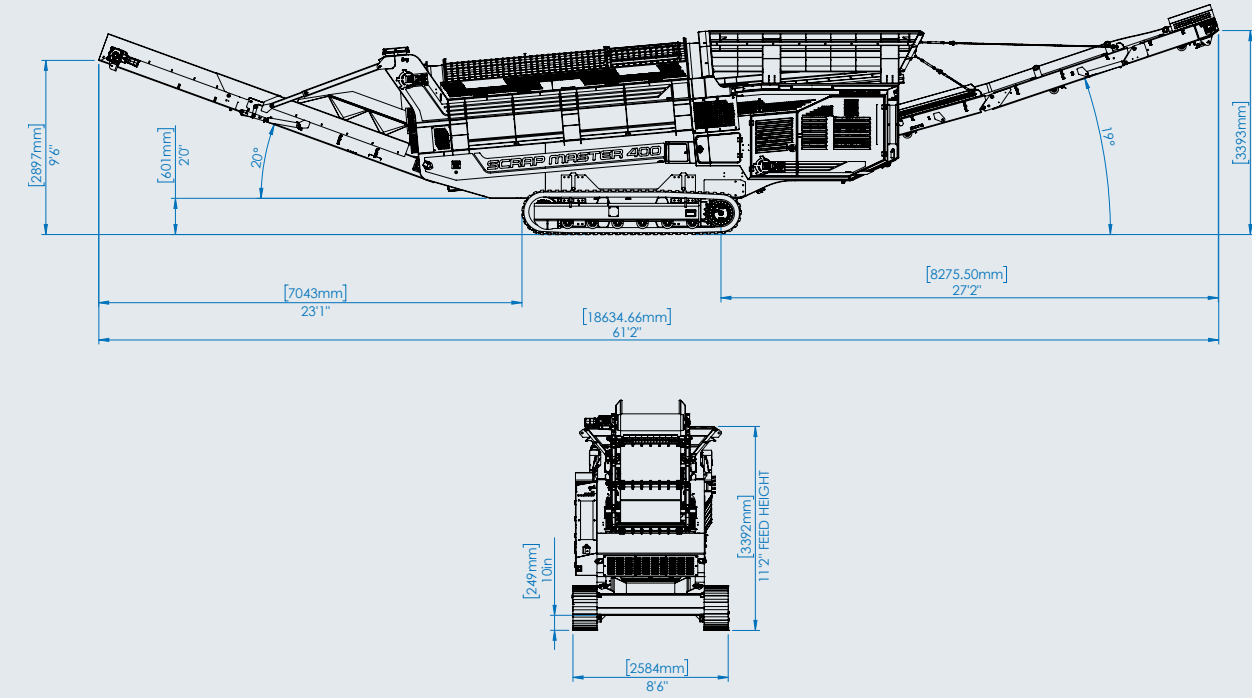


DIMENSIONS SWS 400

TRANSPORT DIMENSIONS WITHOUT CHASSIS RISER

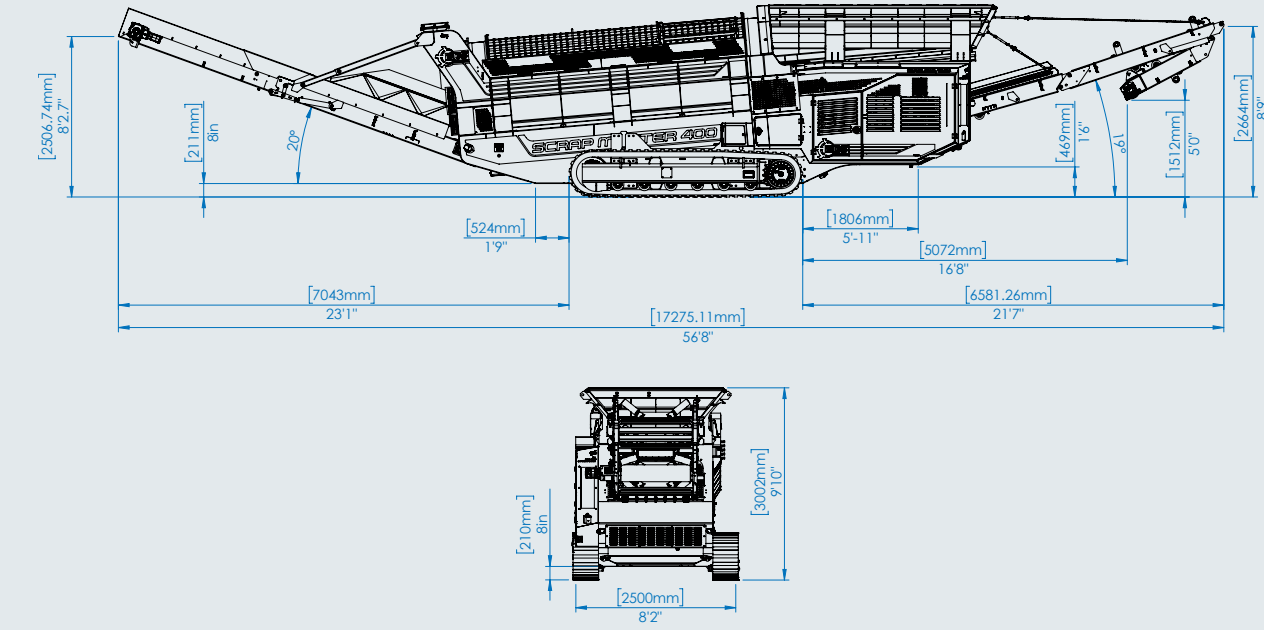

WITH CHASSIS RISER

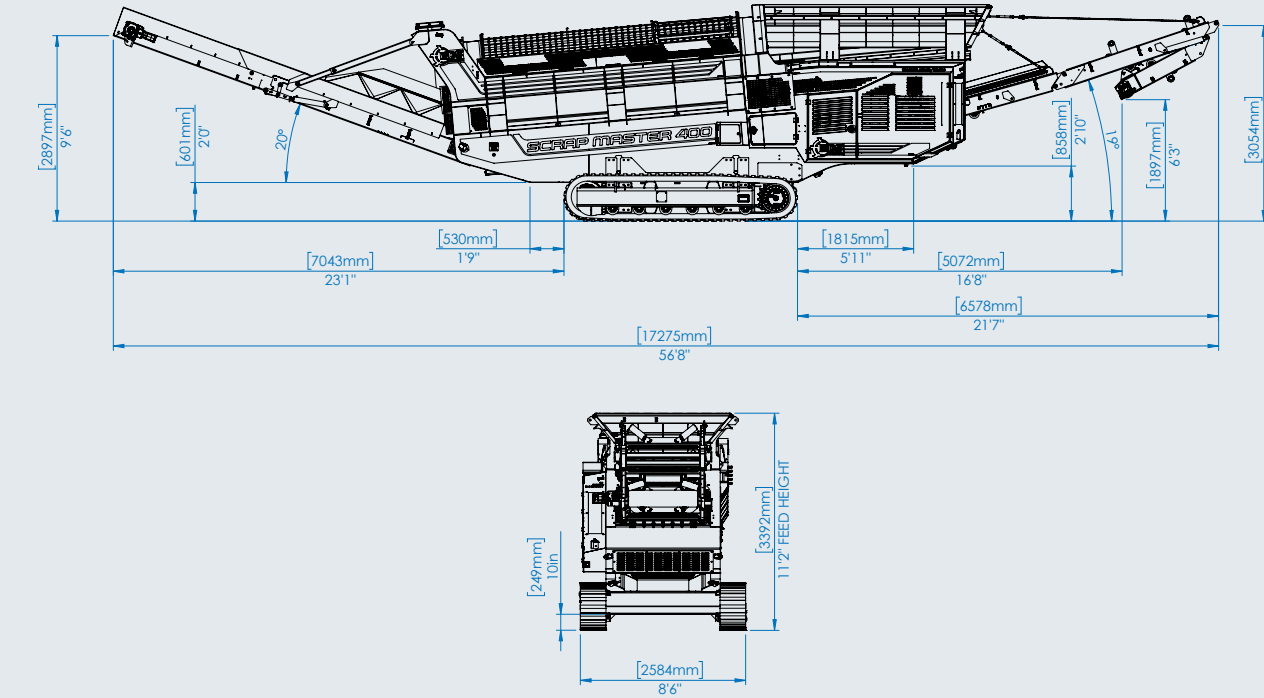



www.terex.com/fuchs

April 2025. Product specifications and prices are subject to change without notice or obligation. The photographs and/or drawings in this document are for illustrative purposes only. Refer to the appropriate Operator's Manual for instructions on the proper use of this equipment. Failure to follow the appropriate Operator's Manual when using our equipment or to otherwise act irresponsibly may result in serious injury or death. The only warranty applicable to our equipment is the standard written warranty applicable to the particular product and sale and Terex makes no other warranty, express or implied.

© Terex Corporation 2025 · Terex, the Terex Crown design, Fuchs and Works For You are trademarks of Terex Corporation or its subsidiaries.

Terex® Deutschland GmbH | Industriestraße 3 | 76669 Bad Schönborn | Germany | Fon: +49 (0) 7253 84-0 | Fax: +49 (0) 7253 84-102 | info@terex-fuchs.com