



# CONVEYOR RANGE

# MCT21 & MCT24 TRACKED CONVEYORS



## FEATURES & BENEFITS

The Fuchs range of mobile conveyors are designed to work in conjunction with the entire range of Fuchs equipment. For convenience and to keep shipping costs low, Fuchs conveyors can be transported in a 40ft container. The range includes 65ft and 80ft track mobile conveyors: MCT21 and MCT24.

TRANSPORT DIMENSIONS	MCT21	MCT24
Length	11.3m (37')	11.88m (38' 11")
Width	2.25m (7' 4")	2.25m (7' 4")
Height	2.65m (8' 8")	2.88m (9' 5")
Weight (Est.)	13,820kgs (30,467lbs)	16,750kgs (36,927lbs)
Containerised shipping	40' x 9' 6" High Cube Container	40' x 9' 6" High Cube Container

CONVEYOR DETAILS	MCT21	MCT24
Conveyor length	19.79m (64' 11")	22.8m (74' 10")
Belt width	1050mm (42")	1050mm (42")
Discharge height	9.1m (29'10") @ 24°	9.9m (32' 5") @ 24°
Max. discharge height	9.45m (31') @ 28°	10.41m (34'1") @ 25°
Production capacity	Up to 500+TPH (551+ US TPH)	Up to 500+TPH (551+ US TPH)

OPTIONS*	MCT21	MCT24
Feedboot liners: AR400 plate or 20mm rubber	•	•
Feedboot extension with liners	•	•
Large capacity biomass hopper	•	•
Chevron belt	•	•
Twin hydraulic drive discharge conveyor	•	•
Aluminium dust covers	•	•
Spray bar at head drum	•	•
Full length skirting rubber	•	•
Overband magnet with hydraulic kit and support frames	•	•
Hybrid complete with hydraulic and electric conveyor drive (400 TPH)	•	•
Twin Electric Drive 2 x 11kw motors (Hydraulic Conveyor Drive Removed) (400 tph)	•	•
Radio Remote to track machine	•	•
Telematics	•	•



- Tier 3: Deutz DT011 36kW (45hp)
- Tier 4F: Deutz TD2.9 45kW (60hp)
- Stage V: Deutz TC 2.9 L4 45kW (60hp)
- Fuel tank volume 200L (58 US GAL)

\* Additional options are available.

# MCT31 TRACKED CONVEYOR

## FEATURES & BENEFITS

The Fuchs MCT31 stockpiler, builds on the hugely successful Fuchs MCT21 & MCT24 conveyors. The extra length of conveyor, and increased power, allows for maximum mobility and flexibility. The conveyor can cope with all applications, from light duty screened material, through to jaw applications. The Conveyor is 100ft long and still retains the ability to be transported worldwide in a 40ft container.



TRANSPORT DIMENSIONS	MCT31
Length	11.9m (39')
Width	2.84m (9' 4")
Height	3.43m (11' 3")
Weight (Est.)	21,800kg (48,060lbs)
Containerised shipping	40' x 9' 6" High Cube Container

CONVEYOR DETAILS	MCT31
Conveyor length	30.1m (98' 9")
Belt width	1050mm (42")
Discharge height	10.1m (33' 1") @ 18°
Max. discharge height	13.1m (43' 11") @ 25°
Production capacity	Up to 600TPH (661 US TPH)

\*\*Contact factory for availability

OPTIONS*
Feedboot liners: AR400 plate or 20mm rubber
Feedboot extension with liners
Impact bed at feedboot area
Anti-roll back flaps
Chevron belt
Heavy duty plain belt
Twin hydraulic drive discharge conveyor
High spec scraper on discharge conveyor at head drum
Dust hood
Canvas dust covers
Dust suppression water spray bar at head drum
Full length skirting rubber
Overband magnet with hydraulic kit and support frames
Grease lines to head drum bearings on discharge conveyor
Radio remote to track machine
Telematics

# MCR24 TRACKED RADIAL CONVEYOR

## FEATURES & BENEFITS

The Fuchs MCR24 tracked radial stockpiling conveyor is the ideal solution for stockpiling after mobile crushing and screening plants. The conveyors ensure all applications are catered for from the easiest, right through to the hardest.



TRANSPORT DIMENSIONS	MCR24
Length	15.2m (49' 10")
Width	2.52m (8' 3")
Height	3.43m (11' 3")
Weight (Est.)	19,800kg (43,651lbs)
Containerised shipping	40' x 9' 6" High Cube Container

CONVEYOR DETAILS	MCR24
Conveyor length	22.9m (75' 1")
Belt width	1050mm (42")
Discharge height	9m (29' 6") @ 18°
Max. discharge height	10.9m (34' 9") @ 23°
Production capacity	Up to 600TPH (661 US TPH)


OPTIONS*
Feedboot liners: AR400 plate or 20mm rubber
Feedboot extension with liners
Impact bed at feedboot area
Anti-roll back flaps
Chevron belt
Heavy duty plain belt
Twin hydraulic drive discharge conveyor
High spec discharge conveyor head drum scraper
Dust hood
Canvas dust covers
Dust suppression water spray bar at head drum
Full length skirting rubber
Grease lines to head drum bearings on discharge conveyor
Belt weigher
Radio remote to stop/start, raise/lower conveyor
Radio Remote to track machine
Auto radial & raise function
Telematics

# MF24H HIGH LEVEL FEEDER



## FEATURES & BENEFITS

The Fuchs MF24H high level feeder, combines the highly versatile feeder system and stockpiling conveyor. The Fuchs MF24H has been designed to maximize productivity and improve efficiency by reducing operational costs in a wide range of applications and feed material types.

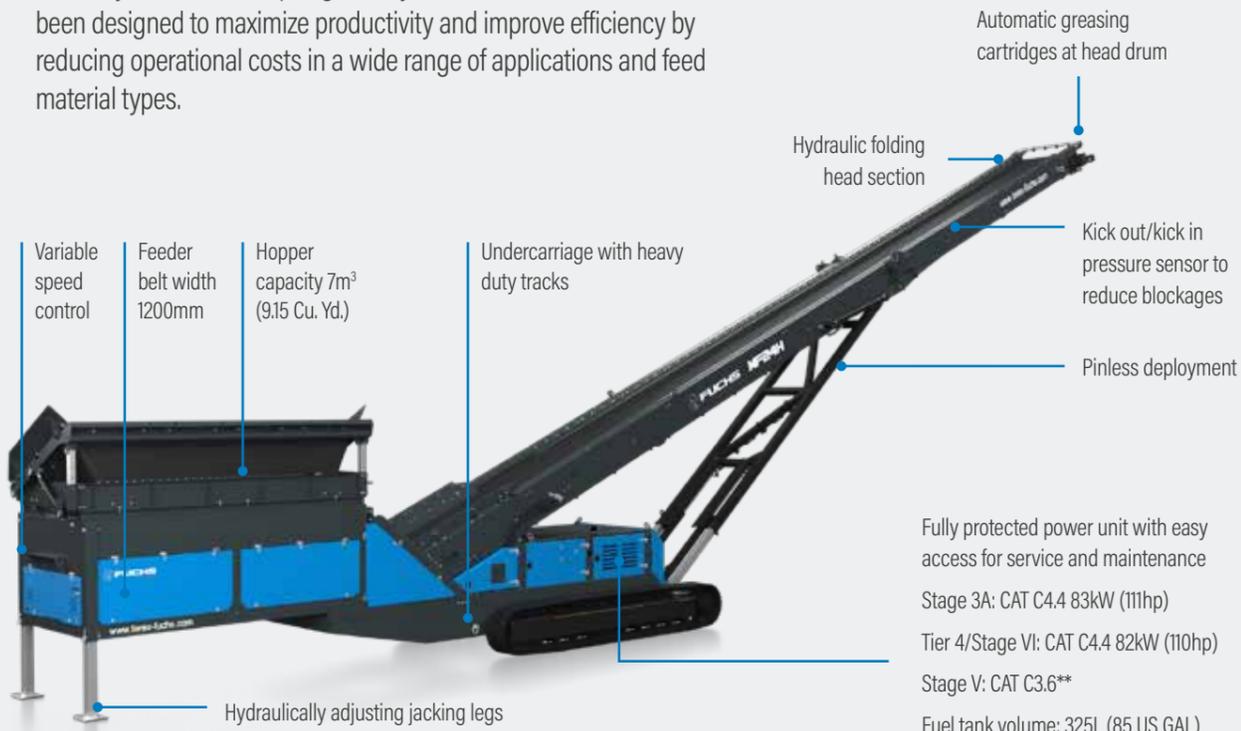

TRANSPORT DIMENSIONS	MF24H HIGH LEVEL
Length	19.5m (63' 11")
Width	2.75m (9')
Height	3.12m (10' 2")
Weight (Est.)	23,500kg (51,808lbs)
Containerised shipping	40' x 9' 6" 2 x High Cube Containers

CONVEYOR DETAILS	MF24H HIGH LEVEL
Discharge conveyor length	22.5m (73' 10")
Feeder length	4.1m (13' 11")
Belt width	1200mm (48")
Discharge height	8m (26' 3") @ 18°
Max. discharge height	9.8m (32' 2") @ 24°
Production capacity	Up to 600+TPH (661 US TPH)


OPTIONS*
AR400 steel wear liners in hopper
4" or 6" tipping grid fitted to feed conveyor
12ft 2-Deck vibrating grid with radio control tipping bofor grid
Upgraded hopper with integrated fall break system
Twin hydraulic drive feed conveyor
Twin Hydraulic Drive Discharge Conveyor
Discharge conveyor drive drum upgraded to ceramic lagging
Discharge conveyor fitted with chevron belt
High spec SCS scraper discharge conveyor at head drum
Canvas dust covers complete with dust hood on discharge conveyor
Dust suppression water spray bar at head drum on discharge conveyor
Full length skirting rubber along discharge conveyor
Belt weigher option
Overband magnet on discharge conveyor with hydraulic kit and support frames
Hybrid
Radio remote to stop/start feed conveyor, raise/lower discharge conveyor and tip grid
Radio remote to track machine
Telematics

# MF24L LOW LEVEL FEEDER



## FEATURES & BENEFITS

The Fuchs MF24L low level feeder allows the operator to directly discharge from wheel loaders and excavators at a significantly lower feed in height compared to standard hopper feeders. The unique design of the hopper allows for rear feeding which can be an advantage when operating in restricted areas.

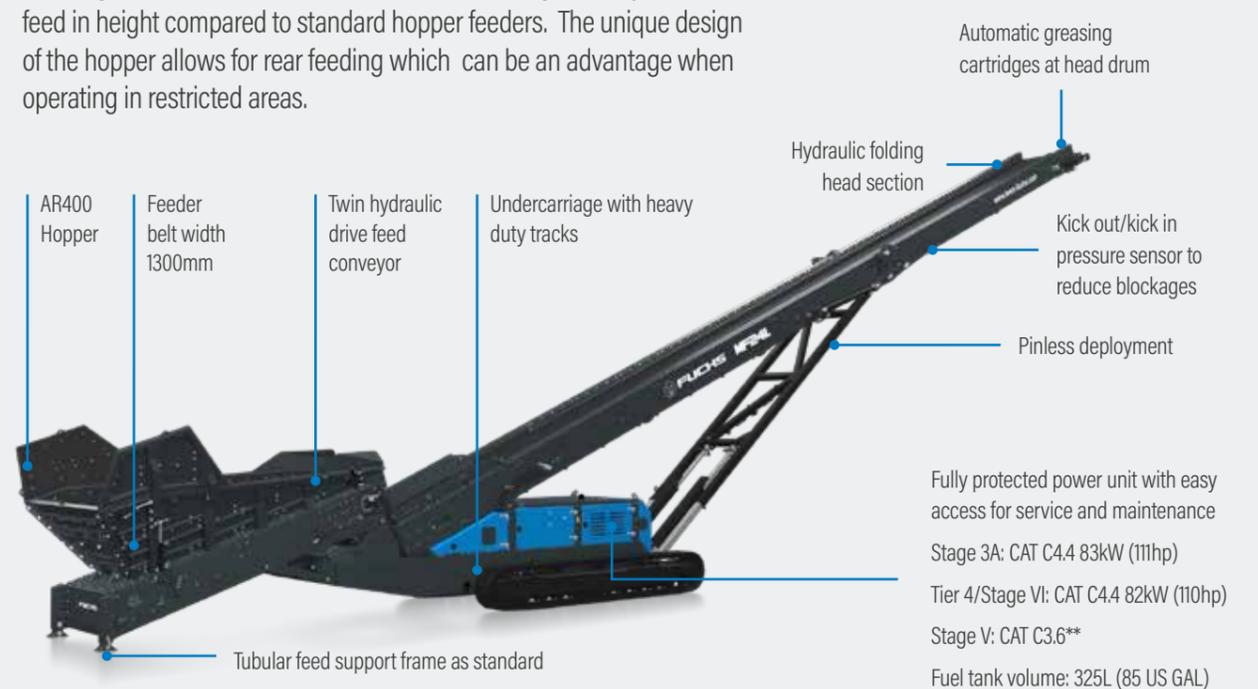

TRANSPORT DIMENSIONS	MF24L LOW LEVEL
Length	19.74m (64' 9")
Width	2.75m (9')
Height	3.35m (11')
Weight (Est.)	24,700kg (54,454lbs)
Containerised shipping	40' x 9' 6" 2 x High Cube Containers


CONVEYOR DETAILS	MF24L LOW LEVEL
Discharge conveyor length	22.5m (73' 10")
Feeder length	4.1m (13' 11")
Belt width	1300mm (4' 3")
Discharge height	8m (26' 3") @ 18°
Max. discharge height	9.8m (32' 2") @ 24°
Production capacity	Up to 600+TPH (661 US TPH)

OPTIONS*
AR400 steel liners bolted into hopper
AR400 steel wear liners on hopper flares
Large capacity hopper
Feedboot lined with 6mm AR400 wearplate
Feed conveyor drive drum upgraded to ceramic lagging
Manually adjusting jacking legs
Discharge conveyor drive drum upgraded to ceramic lagging
Twin hydraulic drive discharge conveyor
Discharge conveyor fitted with chevron belt
High spec SCS scraper discharge conveyor at head drum
Canvas dust covers complete with dust hood on discharge conveyor
Spray bar at head drum on discharge conveyor
Full length skirting rubber along discharge conveyor
Belt weigher
Overband magnet on discharge conveyor with hydraulic kit and support frames
Hybrid
Radio remote to stop/start feed conveyor and raise/lower discharge conveyor
Radio remote to track machine
Telematics

# MF24H ORBITAL FEEDER

## FEATURES & BENEFITS

The Fuchs MF24H Orbital high level feeder permits operators to directly discharge to the hopper/feeder from excavators or wheel loaders. The rotating undercarriage allows the conveyor to rotate a full 360° which provides increased versatility on site. It can be used for a 'metered or controlled' feed of material when working as part of a crushing and screening train or in standalone applications.

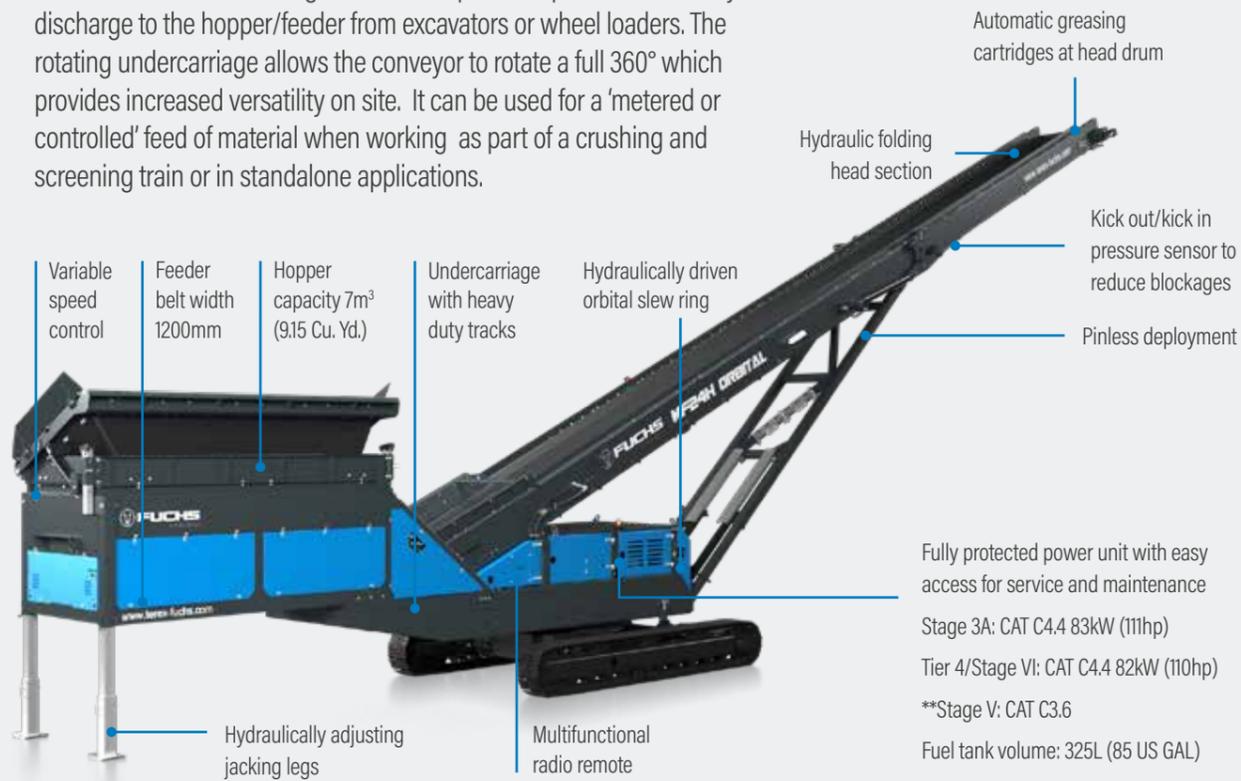

TRANSPORT DIMENSIONS	MF24H ORBITAL
Length	19.5m (63')
Width	3.2m (10' 6")
Height	3.63m (11' 11")
Weight (Est.)	29,300kg (64,595lbs)
Containerised shipping	40' x 9' 6" 2x High Cube Container


CONVEYOR DETAILS	MF24H ORBITAL
Discharge conveyor length	22.5m (73' 10")
Feeder length	4.1m (13' 11")
Belt width	1200 mm (48")
Discharge height	8.80m (28' 2") @ 18°
Max. discharge height	10.7m (34' 6") @ 24°
Production capacity	Up to 600+TPH (661 US TPH)

OPTIONS*
AR400 steel wear liners in hopper
4" or 6" tipping grid option
12ft 2-Deck vibrating grid with radio control tipping bofor grid
Upgraded hopper with integrated Fall Break System
Twin hydraulic drive feed conveyor
Twin hydraulic drive discharge conveyor
Discharge conveyor drive drum upgraded to ceramic lagging
Discharge conveyor fitted with chevron belt
High spec SCS scraper discharge conveyor at head drum
Canvas dust covers complete with dust hood on discharge conveyor
Spray bar at head drum on discharge conveyor
Full length skirting rubber along discharge conveyor
Belt weigher
Overband magnet on discharge conveyor with hydraulic kit and support frames
Telematics

# MF24L ORBITAL FEEDER

## FEATURES & BENEFITS

The Fuchs MF24L Orbital low level feeder features a rotating undercarriage which allows the conveyor to rotate a full 360° to provide increased versatility on site. With unrivalled portability and durability, the MF24L Orbital can operate in a wide variety of working environments. This conveyor can be integrated with crushers and screeners to stockpile material directly from the source. The machine can also be used as a mobile link conveyor.

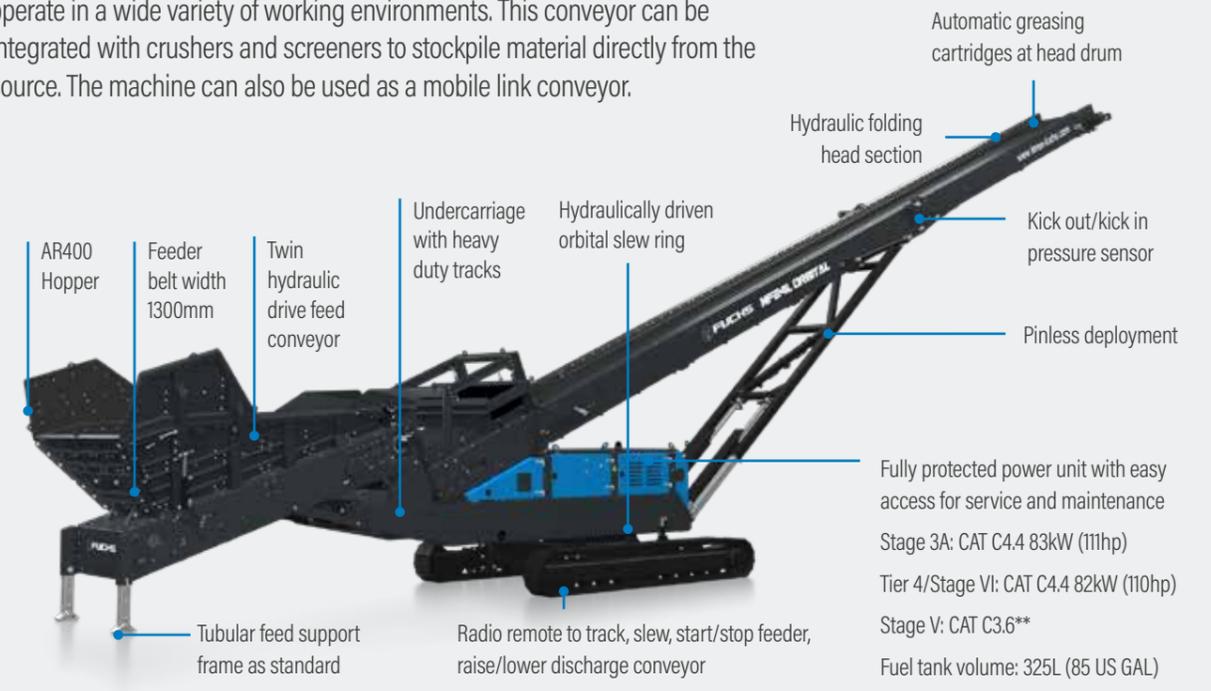

TRANSPORT DIMENSIONS	MF24L ORBITAL
Length	19.7m (64' 8")
Width	3.2m (10' 6")
Height	3.63m (11' 11")
Weight (Est.)	29,550kg (65,146lbs)
Containerised shipping	40' x 9' 6" 2x High Cube Container

CONVEYOR DETAILS	MF24L ORBITAL
Discharge conveyor length	22.5m (73' 10")
Feeder length	4.1m (13' 11")
Belt width	1300mm (4' 3")
Discharge height	8m (26' 3") @ 18°
Max. discharge height	10.7m (35') @ 24°
Production capacity	Up to 600+TPH (661 US TPH)

OPTIONS*
AR400 steel liners bolted into hopper
Large capacity hopper
Feedboot lined with AR400 wearplate
Feed conveyor drive drum upgraded to ceramic lagging
Manually adjusting jacking legs
Discharge conveyor drive drum upgraded to ceramic lagging
Twin hydraulic drive discharge conveyor
Discharge conveyor fitted with chevron belt
High spec SCS scraper discharge conveyor at head drum
Canvas dust covers complete with dust hood on discharge conveyor
Spray bar at head drum on discharge conveyor
Full length skirting rubber along discharge conveyor
Belt weigher
Overband magnet on discharge conveyor with hydraulic kit and support frames
Telematics


(Shown with optional overband magnet)

# MF24H ORGANIC FEEDER



## FEATURES & BENEFITS

The Fuchs MF24H Organic feeder has been engineered specifically for the stockpiling and aerating of lower density, bulky materials such as soils, mulch, biomass and compost. Specifically designed organics hopper improves material flow eliminating bridging and ensures efficient movement of materials whilst the auger at the hopper outlet provides aeration and untangling solution therefore minimizing fluctuations in bulk density of organic materials.

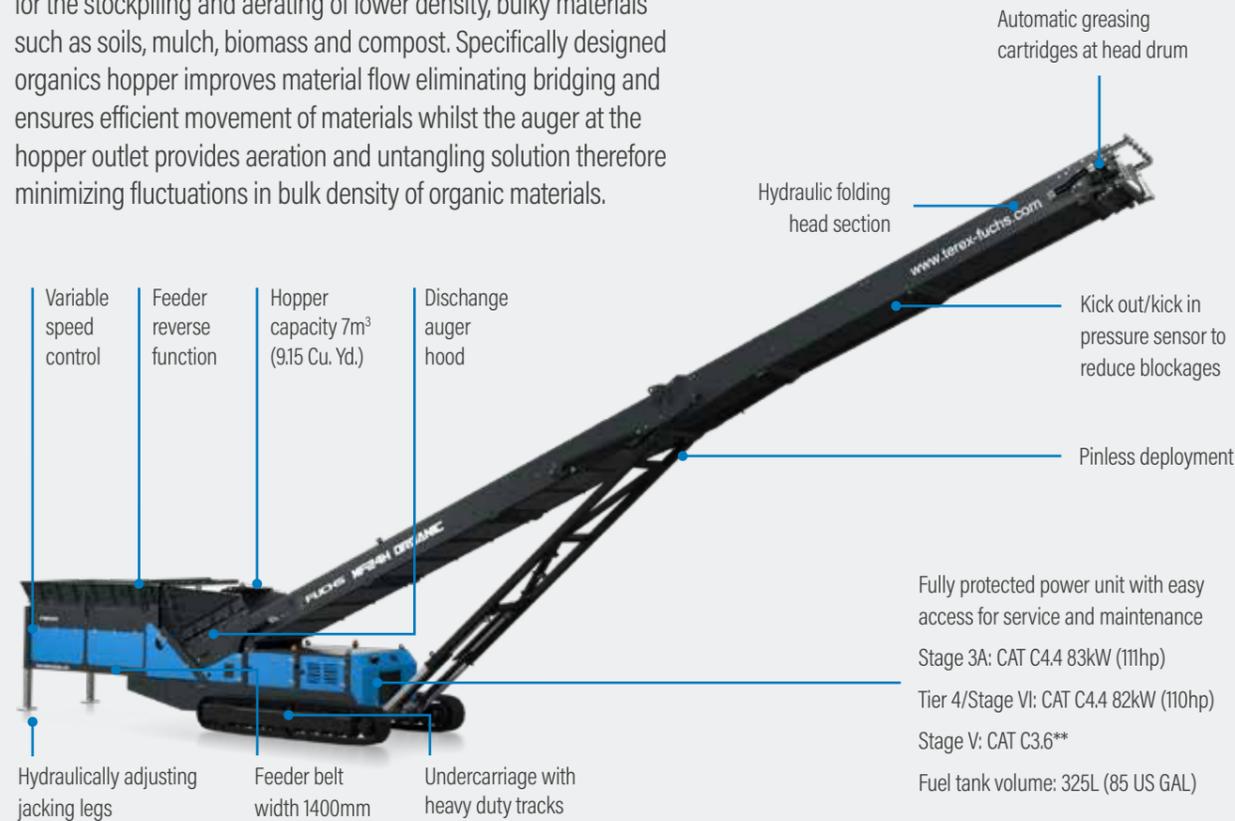

TRANSPORT DIMENSIONS	MF24H ORGANIC
Length	19.5m (63')
Width	2.7m (8' 8")
Height	3m (9' 8")
Weight (Est.)	24,350kg (53,682)
Containerised shipping	40' x 9' 6" 2x High Cube Containers

CONVEYOR DETAILS	MF24H ORGANIC
Discharge conveyor length	22.5m (73' 10")
Feeder length	4.1m (13' 11")
Belt width	1400 mm (56")
Discharge height	8.80m (28' 2") @ 18°
Max. discharge height	9.8m (32' 2") @ 24°
Production capacity	Up to 600+TPH (661 US TPH)

OPTIONS*
Discharge conveyor drive drum upgraded to ceramic lagging
Feed conveyor drive drum upgraded to ceramic lagging
High spec SCS scraper discharge conveyor at head drum
Discharge conveyor underguard length of mid-section
Canvas dust covers complete with dust hood on discharge conveyor
Spray bar at head drum on discharge conveyor
Belt weigher
Overband magnet on discharge conveyor with hydraulic kit and support frames
Hybrid
Radio remote to stop/start feed conveyor, raise/lower discharge conveyor
Radio Remote to track machine
Telematics

# MF24H ORBITAL ORGANIC FEEDER

## FEATURES & BENEFITS

The Fuchs MF24H Orbital Organic feeder features a rotating undercarriage providing increased versatility and is ideal for stockpiling and aerating of lower density, bulky materials such as soil, mulch, biomass and compost. Located at the hopper outlet, the auger provides aeration and an untangling solution for organic materials. The auger flips, rotates and regulates the flow of material minimising fluctuations in the bulk density of organic materials and is equipped with replaceable hardened paddle wear plates.



TRANSPORT DIMENSIONS	MF24H ORBITAL ORGANIC
Length	22.5m (73' 10")
Width	3.2m (10' 6")
Height	3.63m (11' 11")
Weight (Est.)	29,300kg (64,595lbs)
Containerised shipping	40' x 9' 6" 2x High Cube Container

CONVEYOR DETAILS	MF24H ORBITAL ORGANIC
Discharge conveyor length	22.5m (73' 10")
Feeder length	4.1m (13' 11")
Belt width	1400 mm (56")
Discharge height	8m (26' 3") @ 18°
Max. discharge height	10.7m (34' 6") @ 24°
Production capacity	Up to 600+TPH (661 US TPH)

OPTIONS*
Discharge conveyor drive drum upgraded to ceramic lagging
Feed conveyor drive drum upgraded to ceramic lagging
High spec SCS scraper discharge conveyor at head drum
Discharge conveyor underguard length of mid-section
Canvas dust covers complete with dust hood on discharge conveyor
Spray bar at head drum on discharge conveyor
Belt weigher
Overband magnet on discharge conveyor with hydraulic kit and support frames
Telematics

(Shown with optional overband magnet)



**FUCHS**<sup>®</sup>

A TEREX BRAND

**WORKS FOR YOU.**<sup>™</sup>

---

[www.terex-fuchs.com](http://www.terex-fuchs.com)

August 2021. Product specifications and prices are subject to change without notice or obligation. The photographs and/or drawings in this document are for illustrative purposes only. Refer to the appropriate Operator's Manual for instructions on the proper use of this equipment. Failure to follow the appropriate Operator's Manual when using our equipment or to otherwise act irresponsibly may result in serious injury or death. The only warranty applicable to our equipment is the standard written warranty applicable to the particular product and sale and Terex makes no other warranty, express or implied.

© Terex Corporation 2021. Terex, the Terex Crown design, Fuchs and Works For You are trademarks of Terex Corporation or its subsidiaries.

Terex Deutschland GmbH | Industriestraße 3 | 76669 Bad Schönborn | Germany | Phone: +49 (0) 7253 84-0 | Fax: +49 (0) 7253 84-102 | Email: [info.terex-fuchs@terex.com](mailto:info.terex-fuchs@terex.com)