

# TF-75H

HIGH LEVEL FEEDER  
ORGANICS



STRONG **HERITAGE**, STRONG **FUTURE**

 **FINLAY**®  
A TEREX BRAND

# TF-75H

## HIGH LEVEL FEEDER ORGANICS




The Finlay® TF-75H Organics High Level Feeder has been engineered specifically for the stockpiling and aerating of lower density, bulky materials such as soils, mulch, biomass, green waste and compost.


The TF-75H features a large 10m<sup>3</sup> (8yd<sup>3</sup>) hopper with steep side walls and 3.52m (11' 6") feed in height to enable direct feed from wheel loaders, grab cranes, wood grinders, shredders, trommels or screens.

The machine is available with an orbital centre mounted slew bearing that enables 360° rotation and movement of the hopper/feeder to enhance on site mobility.

### TRANSPORT DIMENSIONS

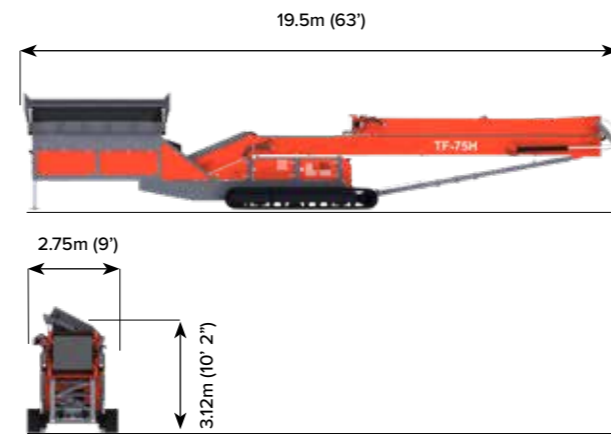

### WORKING DIMENSION

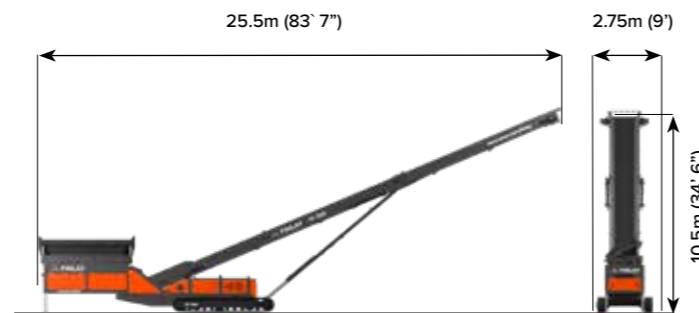

**MACHINE WEIGHT:** 24,550kg (54,123lbs)

### FEATURES:

- Auger at the hopper outlet provides aeration and untangling solution and minimizes fluctuations in bulk density of organic materials.
- Heavy duty auger design, equipped with replaceable hardened paddles.
- The adjustable operating speed of the feeder belt ensures controlled and efficient flow of material onto the discharge conveyor.
- Specifically designed organics hopper improves material flow eliminating bridging and ensures efficient movement of materials.
- The machine is available with hybrid technology consisting of on-board electrical motors permitting the flexibility to run the plant from an outside power supply or standard on-board engine.
- For added flexibility the auger component can be removed from the hopper/feeder to enable the machine to work in other applications.

### 1 ORGANIC HOPPER

Capacity: 10m<sup>3</sup> (8yd<sup>3</sup>)  
Target Area: 4.1 m x 2m (13' 5" x 6')  
Feed in height: 3m (9' 10")  
Discharge auger hood

### 2 AUGER

Auger at the hopper outlet provides aeration and untangling solution and minimizes fluctuations in bulk density of organic materials.

### 3 HYBRID TECHNOLOGY

The machine is available with hybrid technology consisting of on-board electrical motors permitting the flexibility to run the plant from an outside power supply or standard on-board engine.

### 4 SAFETY FEATURES

Inbuilt safety measures engineered into the machine include pinless deployment of the main conveyor.

### 5 DISCHARGE CONVEYOR

Conveyor length: 22.5m (73' 10")  
Belt Width: 1.2m (48")  
Maximum discharge height @ 24° 9.8m (32' 2")  
Full length side skirting along main conveyor



### T-LINK TELEMATICS

T-Link telematics hardware and software along with free seven year data subscription are fitted and installed as standard.



REDUCED  
COST



SITE  
OPERATING  
EFFICIENCY



ENVIRONMENTAL  
CONSIDERATIONS



IMPROVE  
HEALTH &  
SAFETY



PRODUCT  
QUALITY



The material in this document is for information only and is subject to change without notice.

Finlay® assumes no liability resulting from errors or omissions in this document, or from the use of the information contained herein.

Due to continual product development we reserve the right to change specifications without notice. Product performance figures given in this brochure are for guidance purposes only, this information does not constitute an expressed or implied warranty or guarantee, but shows test examples. These results will vary depending on application. Photographs are for illustrative purposes only; some or all of the machines in the illustrations may be fitted with optional extras. Please check with your Dealer for details on optional extras.

Published and Printed in 2023

[www.terex.com/finlay](http://www.terex.com/finlay)

E: [sales@terexfinlay.com](mailto:sales@terexfinlay.com)

T: +44 28 82 418 700

