




# **TDS 815**

### **SLOW SPEED SHREDDER**



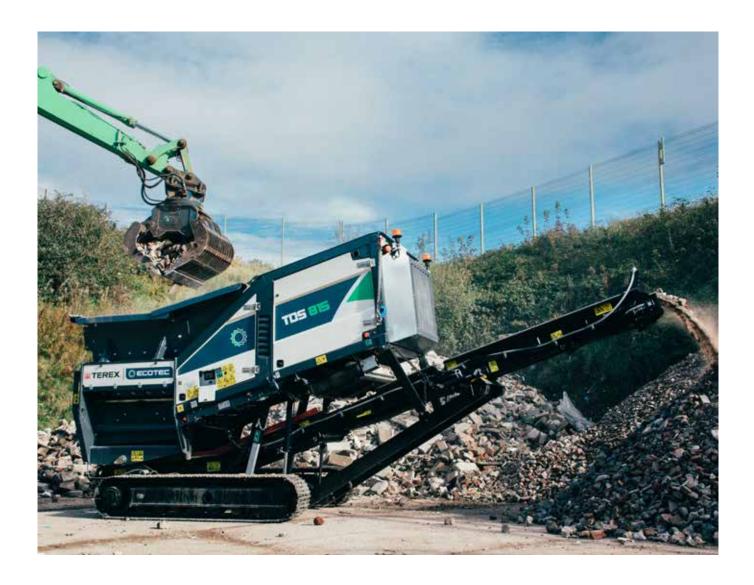

# VERSATILE SHREDDING

The Terex Ecotec TDS 815 shredder is a cutting-edge solution in waste processing, featuring a compact 1.5m twin shaft shredding unit for efficient material reduction. With quick-change shafts for enhanced adaptability and maintenance efficiency, it stands out as a versatile choice. Operators can choose to run the shredder with synced or independent shafts, aligning perfectly with specific application requirements. Powered by a CAT 4.4 140kw stage V engine, weighing 16,500 kilograms, and equipped with a T-Link telemetry system, this shredder is well-suited for a range of applications, including skip waste, bulky waste, household waste, C&D, wood waste, green waste, building waste, stone, and asphalt. Its robust design, intelligent load-sensing hydraulics, and user-friendly controls make it a game-changer in waste processing, offering innovation, adaptability, and reliability across various waste materials.



In the world of waste processing, efficiency, adaptability, and reliability are paramount. Companies and organisations are constantly seeking cutting-edge solutions to tackle the diverse challenges that waste materials present. Enter the Terex Ecotec TDS 815 shredder - a true powerhouse in the field of waste processing.

What sets the TDS 815 apart is its remarkable flexibility. Users have the option to operate the shredder with synced or independent shafts, a feature that aligns perfectly with specific application requirements. This adaptability is invaluable, as it empowers users to tailor their approach to various waste types and processing challenges, ensuring optimal results every time.

The TDS 815's design includes a robust track subframe with bolt-on tracks, catering to both track

# **TDS 815**

## **Engineered to excel in the most** demanding of recycling applications.



and track/hooklift versions. This level of adaptability provides users with greater flexibility in how they deploy the machine to meet their specific needs.

The Terex Ecotec TDS 815 shredder is more than iust a machine: it's a game-changer in the waste processing industry. With its comprehensive set of features, remarkable adaptability, and efficient performance, it emerges as an invaluable asset for those looking to manage waste effectively and with high efficiency. Whether you're dealing with skip waste, household waste, construction debris, or other materials, the TDS 815 shredder is equipped to handle the task with excellence. In the ever-evolving landscape of waste processing, this machine stands as a true testament to innovation and efficiency.

## - KEY FEATURES





User-friendly colour display with Auto Start / Stop function offering simple operation and diagnostics

Customisable shredding programs allow operators to tailor the machine for specific applications



Expertly designed in-house shredding chamber 2 x 1.5m long shafts made from heavy duty steel with

welded teeth Quick removal cassette for easier maintenance and changing of shaft type to ensure all application requirements are met



Quick change replaceable combs and various apertures available



Hooklift option available for ease of transport - CHEM Standard- UK - DIN Standard- European - ANSI- USA







Chamber Camera (Option)



140kW CAT C4.4 Stage V / Tier 4 Final engine

A powerful CAT engine with a low operating speed combined with an efficient hydrostatic drive creates a very responsive shredding action with protection against unshreddable contaminants



**Excellent Service Access** 

# - TECHNICAL DATA



Track / Hooklift

#### TRANSPORT DIMENSIONS Width: 2.5m (8' 2") Height: 3.05m (10') Length: 8.4m (27' 8")

Weight: 16,500kg (36,376 lbs)

TRANSPORT DIMENSIONS - CONVEYOR FOLDED
Width: 2.54m (8' 4")
Height: 3.16m (10' 4")
Length: 7.4m (24' 2")

#### **WORKING DIMENSIONS**

Width: 2.54m (8' 4") Height: 3.9m (12' 8") Length: 8.3m (27' 1") Chamber feed in height: 2.8m (9' 2")

Cat Engine: • CAT C4.4 140kW (188HP) Stage V - EU · CAT C4.4 140kW (188HP) Tier 4 Final - USA · CAT C4.4 129kW (173HP) Stage IIIA - ROW

Independent close loop pumps & motors

#### SHREDDING UNIT

POWERUNIT

Chamber - Twin shaft slow speed shredder & high torque Shafts synced or independent, dependent upon application Shaft Length: 1500mm Shaft Diameter: 250mm Effective Tool Diameter: 660mm Various shaft styles Torque per shaft: 80,000Nm Quick removal of shafts Replaceable tooth shafts

#### Quick removal or comb assembly

Various comb / breaker bar arrangements

#### HOPPER

Chamber target area: 1.8mx 2.6m 2.5m<sup>3</sup> capacity

#### PRODUCT CONVEYOR - SINGLE PIECE CONVEYOR

Width: 800mm (32") Max. Belt Speed: 150m/min (490' /min)

Discharge Height: 3.3m (10' 10")

#### TRACKED UNDERCARRIAGE

Bolt on tracks 400mm (16") shoe 2500mm (8' 2") sprocket centres

#### OPTIONS

Over Band Magnet
Various Shaft Configurations
Various Comb Set Ups
Hooklift Frame Set Up
Fire Suppression
Chamber Camera & Monitor
Reversible Engine Fan
Hydraulic Folding Conveyor

## CUSTOMER SUPPORT With you every step of the way

We work with our customers to understand their equipment needs to select the product most suited to their business requirements. Terex Ecotec customer support incorporates a range of services including parts, technical support, warranty and financial services.

#### Ō The Right Part at the Right Time

Terex Ecotec has a full inventory of genuine Terex parts through our global support locations and dealer network. We are committed to getting the right parts delivered at the right time. Using genuine Terex parts ensures optimum performance and reliability.

## Expert technical support

Terex Ecotec provide highly qualified service personnel to ensure that we have Terex Ecotec are able to offer finance solutions to our customers. Our team of finance professionals know the importance of working closely with customers to the ability to provide technical support when our customers need it. This support understand their unique business challenges as well as their financial goals and is provided in conjunction with our dealer network. We ensure our customers are requirements. Obtaining financing is often a time-consuming task, so we work supported throughout the lifecycle of their machine. hard to provide a reliable, flexible and responsive service.



Specification subject to change without notice



#### Warranty Delivering on our promise so you can keep yours

Terex Ecotec warrants its new equipment to be free of defects in material or manufacture for a specified period from the date the equipment is first used.

#### **Terex Financial Services** Financing that works for you



#### CAMPSIE

DUNGANNON

32 Farlough Road

Dealer Stamp:

20 Keans Hill Road Campsie Industrial Estate BT47 3YT, Northern Ireland

Dungannon, Co. Tyrone BT71 4DT, Northern Ireland

Tel: +44 (0) 28 87 718 500

Tel: +44 (0) 28 7122 3110

#### NEWTON

22 Whittier Street Newton, New Hampshire USA, 03858

Tel: +1 (603) 382 0556

December 2023. The material in this document is for information only and is subject to change without notice. Terex Ecotec assumes no liability resulting from errors or omissions in this document, or from the use of the information contained herein. Due to continual product development we reserve the right to change specifications without notice. Any product performance figures given in this brochure are for guidance purposes only. This information does not constitute an expressed or implied warranty or guarantee, but shows text examples provided. These results will vary depending on product settings, screen media and sizes, feed source and types of material being processed. Photographs are for illustrative purposes only. Some or all of the machines in the illustratives may be fitted with optional extra. Products and services listed may be trademarks, service marks or trade names of Terex Corporation and/or its subsidiaries in the USA and other countries. All rights reserved. Terex is a registered trademark of Terex Corporation in the USA and many other countries @ 2023 Terex Corporation.

