

 **TEREX**® | UTILITIES

COMMANDER *SERIES*



BUILT. DIFFERENT.

1-844-TEREX-4U
WWW.TEREX.COM/UTILITIES



The Terex® Commander 6000 Series is known for its overall productivity, reliability, and work zone capacity. Available with a turntable mount winch, Terex digger derricks get the job done by allowing you to dig, lift, and set the pole without having to move the truck. Terex digger derricks feature industry-leading trapezoidal dual hydraulic lift cylinders, which work to stabilize the boom during digging and rotating.


MODEL	Maximum Capacity	Capacity @ 10 ft. Radius	Sheave Height			Horizontal Reach			Digging Radius	
			A1	A2	A3	B1	B2	B3	S1	S2
C6054	42,570 lb (19,309 kg)	18,500 lb (8,391 kg)	32.4 ft (9.9 m)	43.2 ft (13.2 m)	54.1 ft (16.5 m)	22.3 ft (8.8 m)	33.3 ft (10.0 m)	44.3 ft (13.5 m)	19.3 ft (5.9 m)	30.3 ft (9.3 m)
C6060	30,000 lb (13,608 kg)	15,350 lb (6,963 kg)	34.4 ft (10.5 m)	47.2 ft (14.4 m)	60.0 ft (18.3 m)	24.3 ft (7.4 m)	37.3 ft (11.4 m)	50.3 ft (15.3 m)	21.3 ft (6.5 m)	34.3 ft (10.5 m)

Features

- Dual Lift Cylinders
- Rectangular Fiberglass Boom - Third Section - Rated at 46kV
- Box Beam Steel Lower and Intermediate Boom
- Hydraulic Boom Extension Intermediate & Upper
- Full Pressure Hydraulic Controls
- Custom Made Zoned Load Chart
- Hydraulic Tilting Pole Guides with Interlock
- Transferable Pole Guides
- Continuous Unrestricted Rotation
- 15,000 lb. Turntable Winch
- Meets or Exceeds ANSI A10.31
- Hydraulic Overload Protection (HOP)
- 100 Degrees of Boom Travel (+80 to -20)

Optional Equipment

- X and Y Boost for Increased Lifting Capacity
- Various Digger Motors
- Terex Manufactured Augers and Accessories
- Various Types of Full-Pressure Hydraulic Controls
- Flex Pro Electronic Control Console Options
- Compatible with Several Radio Remotes
- Various Command Post Configurations
- Multiple Pole Guide Sizes
- Fiberglass Personnel Platform
- Terex Hollow Kelly Bar
- Load Display

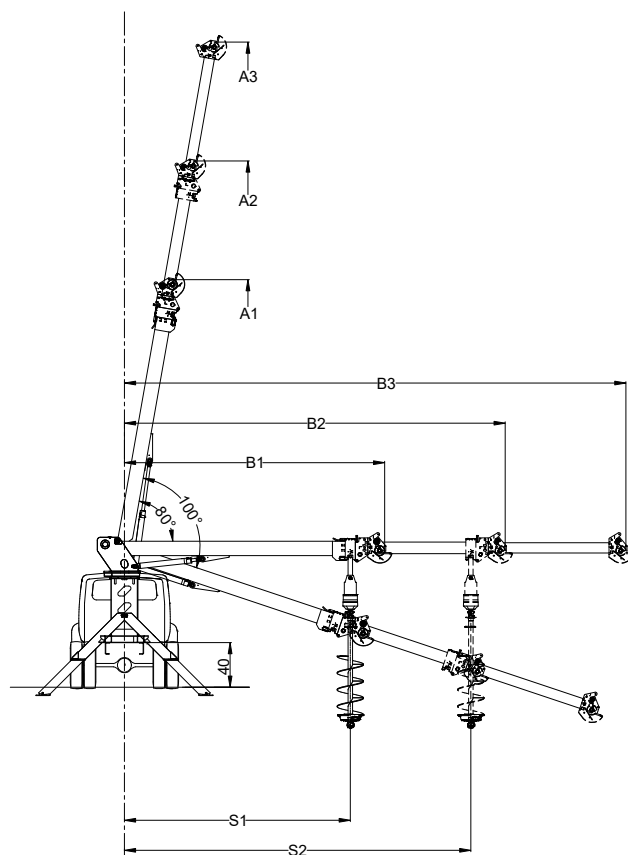

1-844-TEREX-4U

WWW.TEREX.COM/UTILITIES

BUILT. DIFFERENT.