




TEREX®

TECH TIPS

TEREX HOSE PART NUMBER REFERENCE

NO. 140

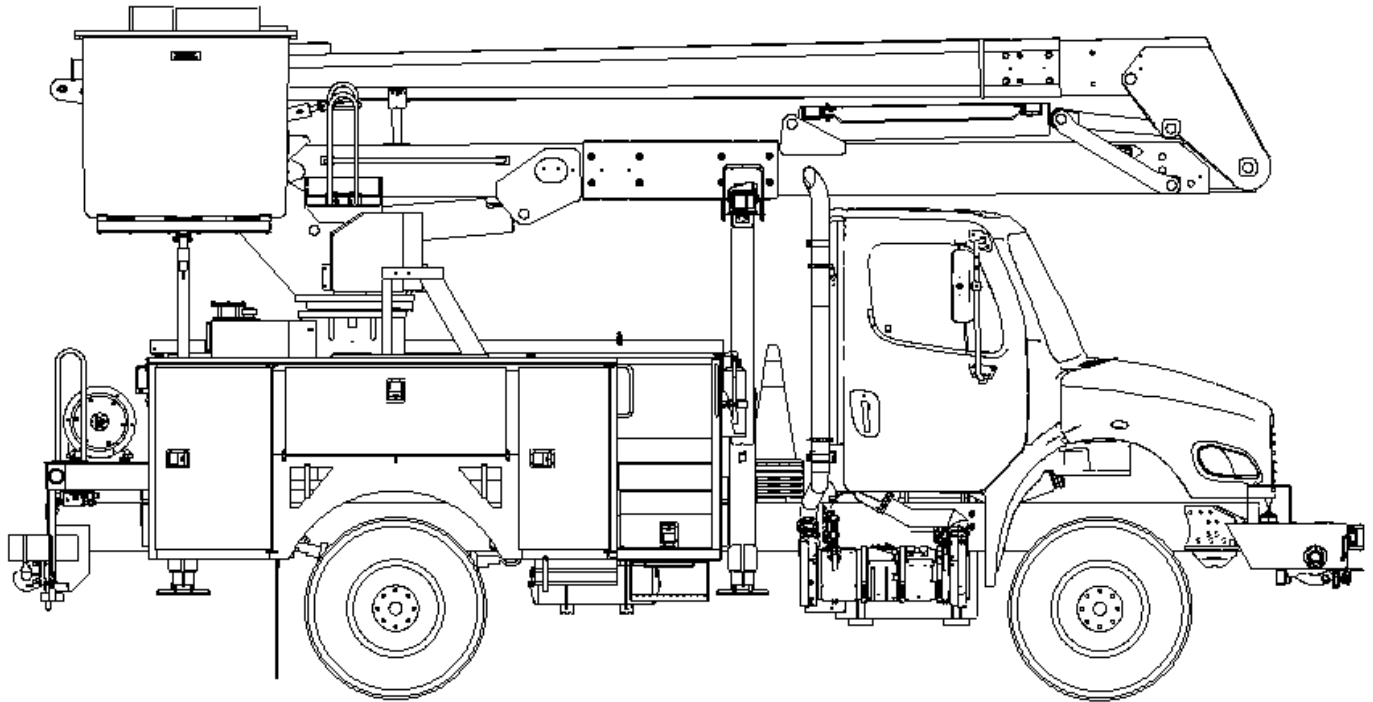

SERVICE CALL:
TIGHTENING 37° JIC FLARE
FITTINGS




MODEL(S):
ALL TEREX UTILITIES EQUIPMENT
USING 37° FLARE FITTINGS ON
HOSES



TOOLS NEEDED:
STANDARD WRENCH SET
ANGLE WRENCH SET

TEREX UTILITIES TECHNICAL SUPPORT TEAM

PHONE: 1-844-TEREX4U (1-844-837-3948) | EMAIL: UTILITIES.SERVICE@TEREX.COM

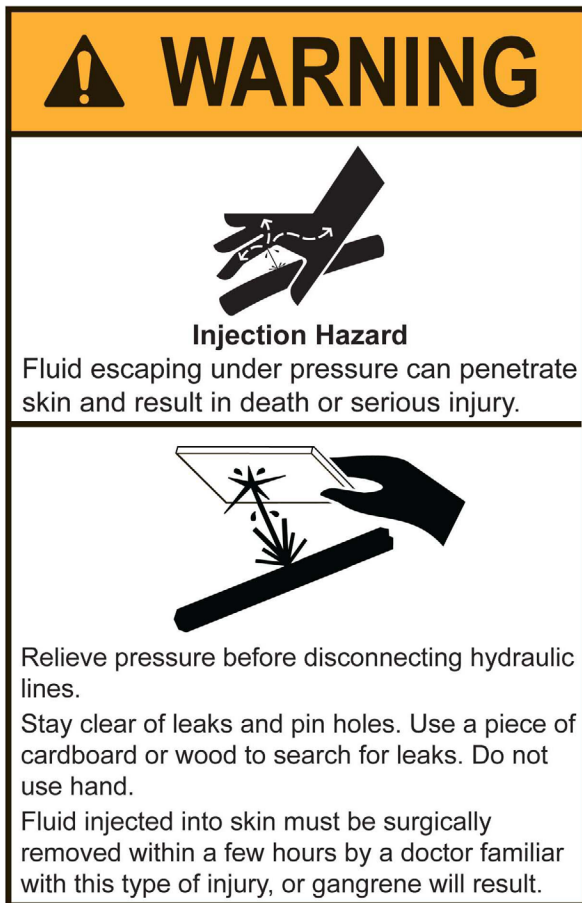

DANGER

Failure to obey the instructions and safety rules in the appropriate Operator's Manual and Service Manual for your machine will result in death or serious injury.

Many of the hazards identified in the Operator's Manual are also safety hazards when maintenance and repair procedures are performed.

DO NOT PERFORM MAINTENANCE UNLESS:

- ✓ You are trained and qualified to perform maintenance on this machine.
- ✓ You read, understand and obey:
 - manufacturer's instructions and safety rules
 - employer's safety rules and worksite regulations
 - applicable governmental regulations
- ✓ You have the appropriate tools, lifting equipment and a suitable workshop.

The information contained in this Tech Tip is a supplement to the Service Manual. Consult the appropriate Service Manual of your machine for safety rules and hazards.



TECH TIP 140 | RELEASED 01.29.2025 | VERSION 1.0
©TEREX UTILITIES. ALL RIGHTS RESERVED

Introduction

The branding on Terex hoses has changed, the following can be used as a guide to associate the hose size with the Terex part number if the hose size is not listed on the hose.

STEP 1 - Non-Conductive Hose

- 1/8" - H18706TU
- 3/16" - 48497TU
- 1/4" - 48494TU
- 5/16" - 48495TU
- 3/8" - 48496TU
- 1/2" - 48498TU





FOR FURTHER ASSISTANCE,
CONTACT THE TEREX UTILITIES TECHNICAL SUPPORT TEAM
PHONE: **1-844-TEREX4U (1-844-837-3948)** | EMAIL: [**UTILITIES.SERVICE@TEREX.COM**](mailto:UTILITIES.SERVICE@TEREX.COM)
