

#### India

##### Hosur

Terex India Private Limited  
E-18,Phase II,Expansion-II  
SIPCOT Industrial Complex,  
Hosur-635 109 Tamil Nadu,India  
Tel: +91 4344 302000

##### Delhi

906- 907 , 9th floor,Palm Spring Plaza  
Golf Course Road, DLF Phase 5,  
Sector 54, Gurugram, Haryana 122003  
Tel: +91 81306 96290

#### North America

909 17th Street NE  
Cedar Rapids, IA 52402  
Tel: +1 319 363 3511 or +1 800 821 5600  
Fax: +1 319 399 4871

212 South Oak Street  
Durand, MI 48429  
Tel: +1 989 288 3121 or +1 888 571 8352  
Fax: +1 989 288 4113

#### Europe, Russia & Africa

32 Farlough Road,  
Dungannon, County Tyrone,  
Northern Ireland BT72 4DR  
Tel: +44 (0) 28 8744 0795

#### Central Asia, Turkey & North Africa Region

Mehmet Akif Ersoy Mah.287.SkNo 1/D  
06172 Yenimahalle - Ankara Turkey  
Tel: +90 312 354 90 90

#### Australia

**Melbourne, Victoria**  
133 Logis Boulevard  
Dandenong South, VIC 3175  
Tel: +61 3 8794 4100  
Fax: +61 3 9706 7810

**Sydney, New South Wales**  
114 Hassall St  
Wetherill Park, NSW 2164  
Tel: +61 2 9604 6524  
Fax: +61 2 9604 9368

**Brisbane, Queensland**  
585 Curtin Ave East  
Eagle Farm, QLD 4009  
Tel: +61 7 3630 0866  
Fax: +61 7 3630 1097

**Perth, Western Australia**  
4 Miles Rd  
Kewdale, WA 6105  
Tel: +61 8 6254 4100  
Fax: +61 8 9350 5534

#### Middle East, East Africa, and SE Asia

Office # 305, Pinnacle Building  
Sheikh Zayed Road, Al Barsha 1, Dubai, UAE  
Tel: +971 4 399 0381  
Fax : +971 4 399 0382

#### Malaysia

Subang Jaya, Selangor, Malaysia  
Contact: Mr. Benjamin Tong  
Tel: +60(3) 5622 6103 or +60(3) 5622 6199  
Fax : +60(3) 5631 6211

#### Thailand

777/1, Moo 7, Bangplee-Tumru Road,  
Bangpleeyai, Bangplee, Samutprakarn,  
10540, Thailand  
Tel: +66 2 316 4656 or +66 2 316 4658  
Fax: +66 2 316 4660

[www.terexmps.com](http://www.terexmps.com)

Product specifications and prices are subject to change without notice or obligation. The photographs and/or drawings in this document are for illustrative purposes only. Refer to the appropriate Operator's Manual for instructions on the proper use of this equipment.


Failure to follow the appropriate Operator's Manual when using our equipment or failure to act responsibly may result in serious injury or death.

The only warranty applicable to our equipment is the standard written warranty applicable to the particular product and sale, and Terex makes no other warranty, express or implied. Terex, the Terex Crown design, Cedarapids, Canica, Simplicity, Jaques, El-Jay and Rollercone are trademarks of Terex Corporation or its subsidiaries. All rights are reserved. © 2017



## Terex® MPS Modular Plants

### MTC1150 Cone Plant

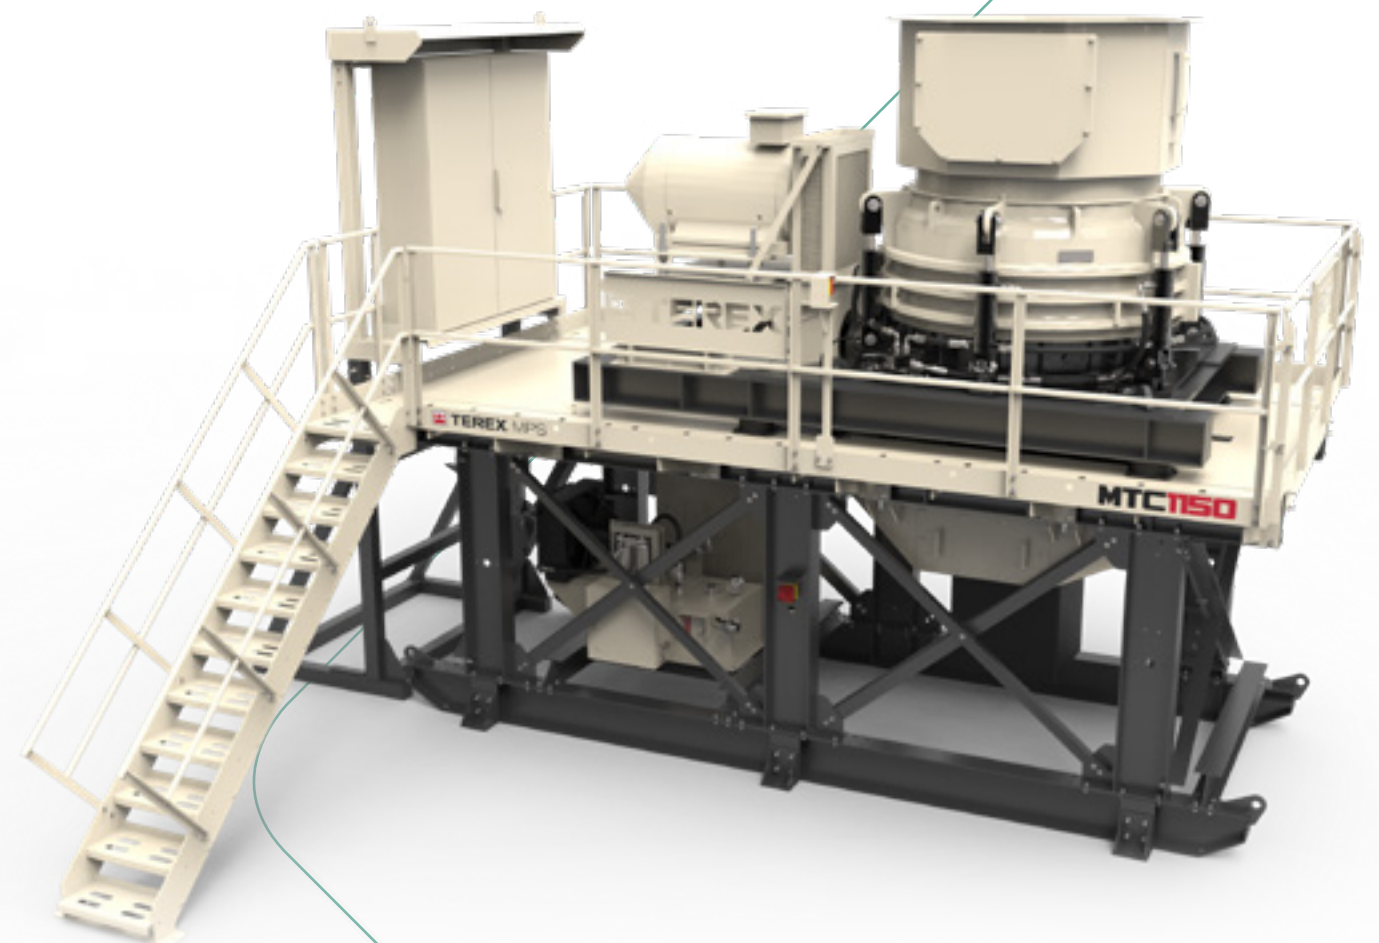

A world working better™

# Terex® MPS Modular Plants

## MTC1150 Cone Plant

**Flexible, Robust Design with Logistics in Mind**  
Designed around our proven, high-performance TC1000 & TC1300 cones, our TC1150 offers a nominal cone head diameter of 45”(1150 mm). It features a one-piece upper frame for all liner configurations, a no-hit concave and new mantle liner retention systems. Other enhancements include greater tramp clearance and increased clamp hold down pressure. Options include an anti-spin device and an upgraded platform offering wider walkways plus easier maintenance access.

- Key Features**
- Fast set-up time
  - Ease of operation
  - On-site assembly with minimal wiring
  - Integrates with existing plant configuration
  - All electric
  - Compact – can be transported in containers and by road
  - Robust, weather-protected panels with user-friendly controls
  - Fully painted structures including walkways, stairs and guard rails
  - Extra heavy-duty I-beam frames

- Controls**
- Manual/Automatic one touch startup with start sequencing
  - Flexibility to remove standard base cone control panel ACE6 and option to add switchgear panel
  - Eriez Metal detector kit

- Commonality**
- Jaw unit electricals including cable kit, control panel (standard plant set for 380V/50Hz) weather protected robust control panel houses user friendly controls ground mounted up to maximum 3m from plant
- Durability**
- Fully Painted Structure
  - All electric
  - Heavy Duty Nema Type 12 / IEC60529 Control Panel (Hoffman style)
  - Rock Box design discharge chute

- Set Up**
- Easy assemble and disassemble
  - Pre-assembled sections to enable quick set up time and as few lifts as possible from container
  - Pre-wired

- Transport**
- 1 x 40’ Standard Open Top Container
  - + 1 x 20’ for Cone Open Top Container

- Options**
- Overflow Chute
  - Electrical Switch Gear
  - Off Plant conveyor starter kit
  - Ultrasonic Level Control
  - Operator working light kit
  - Cone Feed Camera kit

- Main Components**
- Painted Modular Structure, steps and guardrails  
23,654 Kg 52,150 lbs

Cone Specifications		
Approximate Component Weights & Basic Dimensions		
Whole Crusher Dry Weight	14000 Kg	31,360 lbs
Upper Frame Assembly	4861 Kg	10,717 lbs
Cone Head Assembly	1770 Kg	3,902 lbs
Eccentric Assembly	1511 Kg	3,331 lbs
Countershaft Assembly	237 Kg	522 lbs
Main Frame Assembly	5356 Kg	1,808 lbs
Mantle Liner	610 Kg	1,345 lbs
Concave Medium Course	553 Kg	1,219 lbs
Concave Extra Course	524 Kg	1,155 lbs
Concave Fine	576 Kg	1,270 lbs

Maximum Feed Size		
Extra Course Configuration	220 mm	8.7"
Medium Course Configuration	190 mm	7.5"
Fine Configuration	110 mm	4.3"

Minimum Recommended CSS		
Extra Course Configuration	25 mm	1.0"
Medium Course Configuration	18 mm	0.71"
Fine Configuration	12 mm	0.47"

