


CEDARAPIDS®

A TEREX BRAND

Modular Plants

MJ42 Jaw Module

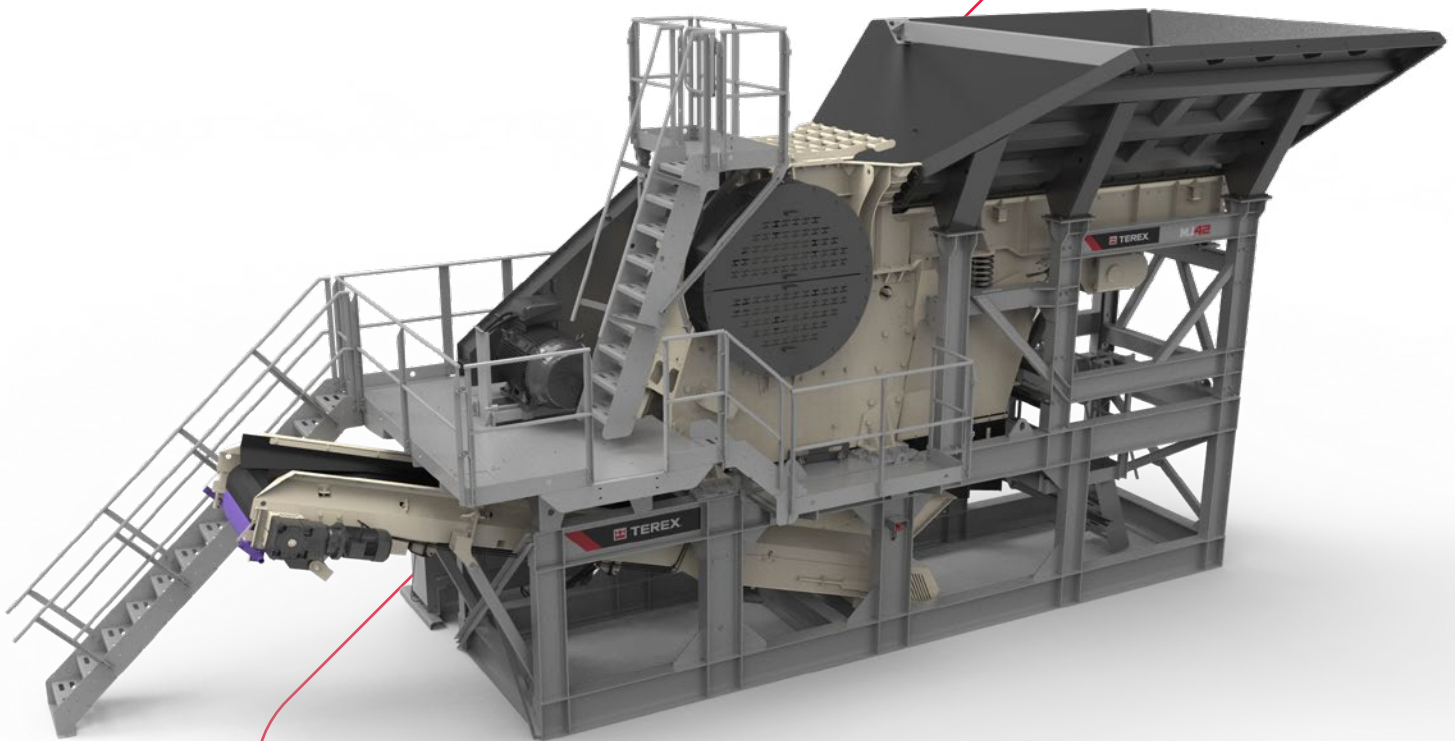

A world working better™

 **TEREX®** MPS

Cedarapids® Modular Plants

MJ42 Jaw Module

The Cedarapids® MJ42 modular jaw crusher features the rugged JW42 jaw for high production. Its hydraulically actuated wedge system allows closed-side settings to be made quickly and easily.


Standard Features

Module Structure

- Bolts together on-site, quick setup time with basic tools
- Pre-wired “plug and play” design, minimal on-site wiring
- Robust weather-protected control panel with user-friendly controls
- Galvanized steel structure including walkways, stairs, and guard rails
- CE compliant module structure and components
- Systematically packed in shipping containers for quick site setup and easy transport

Jaw Crusher

- Cedarapids JW42 jaw crusher
- Hydraulic wedge jaw closed side setting adjustment
- Quick change jaw die wedge system
- Robust jaw frame design
- Large diameter, forged main shaft

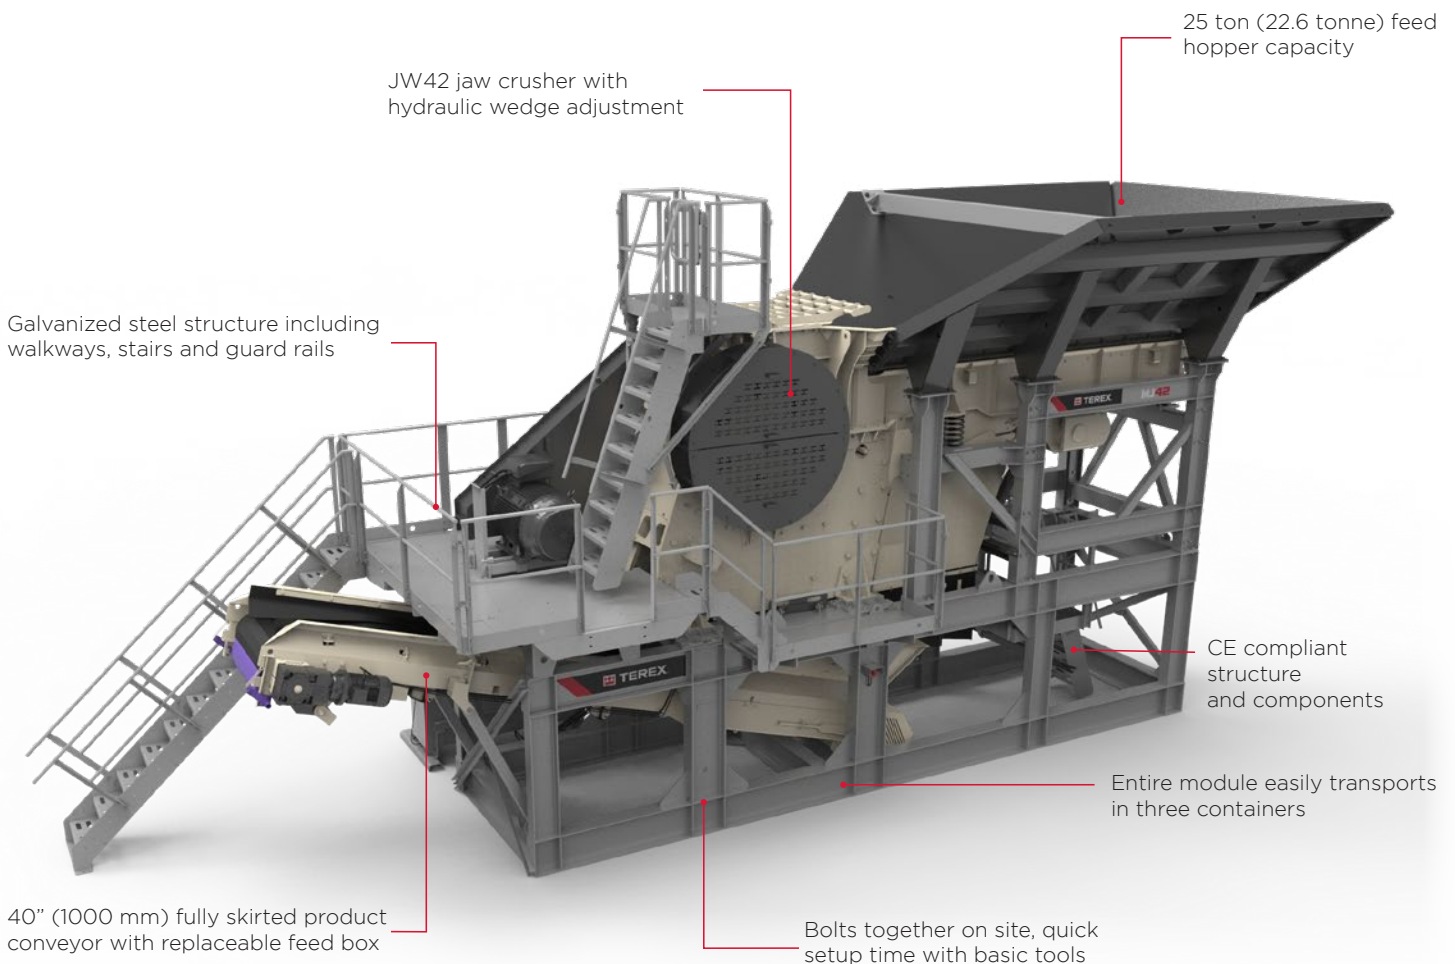

Hopper

- Three-piece hopper
- Hopper length: 17'4" (5.3m)
- Hopper width: 12' (3.98m)
- Hopper capacity: 25 tons (22.6 tonnes)
- Hopper body: 5/8" (15mm) thick wear resistant steel plate, mild steel reinforcing ribs

Discharge Conveyor

- 40" (1000mm) 3-ply belt with 15 hp (11kW) electric drive motor
- Impact bars at feed point
- Hardox liners at crusher feed point
- High spec scraper at head drum
- Skirted full length

Vibrating Grizzly Feeder

- Spring mounted vibrating pan and grizzly feeder
- Vibrating unit: twin heavy-duty cast eccentric shafts running in spherical roller bearings, gear coupled at drive end
- V-belt drive, 20 hp (15kW) motor with guard
- Feeder length: 14'1" (4.3m); feeder width: 3'6" (1.06m)
- Grizzly length: 7' (2.12m); two replaceable 3'6" (1.06m) stepped cartridge grizzlies, 3" (75mm) nominal aperture, self cleaning
- Under-screen: rubber blanking mat; wire mesh is optional

Optional Equipment


- Hydraulic power unit for push button CSS adjustment

Jaw Specifications		
Motor Size	150 hp	110 kW
Feed Opening	30" x 42"	762 x 1070 mm
Crusher Weight	38,130 lbs	17,300 kg
Setting Range	2" - 6.5"	50 - 165 mm
Capacity	150 - 475 TPH	135 - 430 MTPH
Standard Adjustment	Hydraulic Wedge	
Frame Style	Bolted/Cast	
Lubrication System	Grease	

Plant Chute-Work

- Three-piece crusher feed chute
- Grizzly fines/bypass 2-way chute discharges to product conveyor or optional fines conveyor when fitted; hand operated flap door directs grizzly fines

Working Dimensions

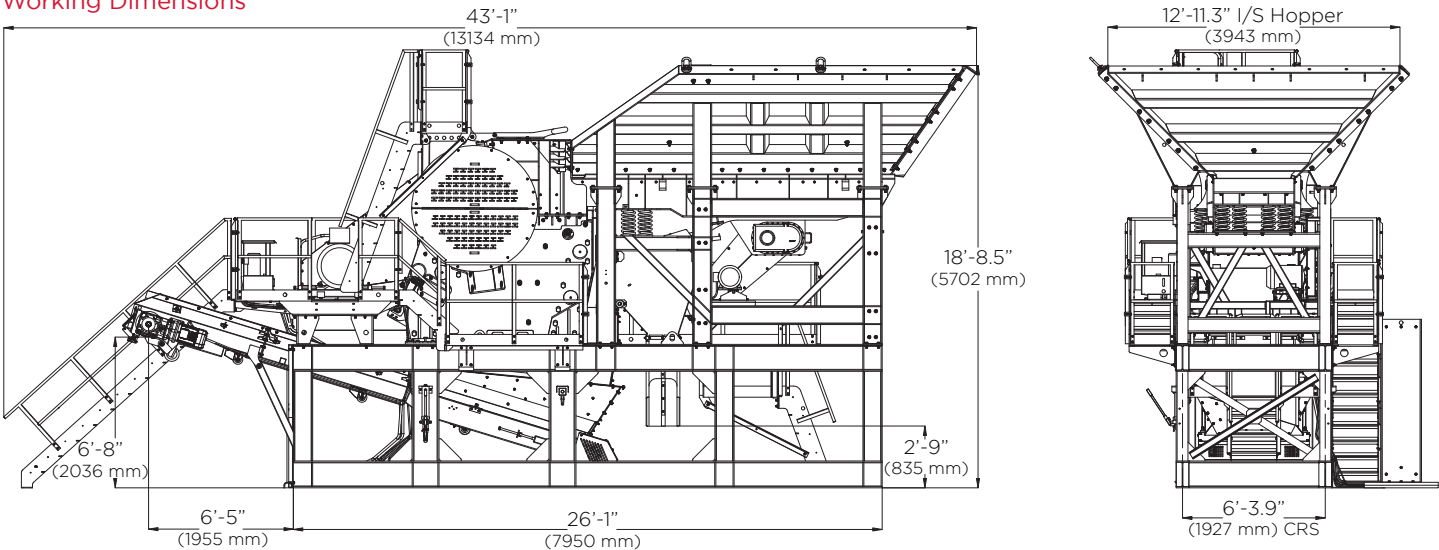



www.terexmps.com

November 2020. Product specifications and prices are subject to change without notice or obligation. The photographs and/or drawings in this document are for illustrative purposes only. Refer to the appropriate Operator's Manual for instructions on the proper use of this equipment.

Failure to follow the appropriate Operator's Manual when using our equipment or failure to act responsibly may result in serious injury or death.

The only warranty applicable to our equipment is the standard written warranty applicable to the particular product and sale, and Terex makes no other warranty, express or implied. Terex, the Terex Crown design, Cedarapids, Canica, Simplicity, Jaques, El-Jay and Rollercone are trademarks of Terex Corporation or its subsidiaries. All rights are reserved. © 2020

