

CEDARAPIDS[®]
A TEREX BRAND

Terex[®] MPS
Portable Plants

CRH1313R Portable
Impactor & Screen Plant



A world working better™

 **TEREX[®] MPS**

Terex® MPS Portable Plants

Portable Impactor and Screen Plant

Exceptional Productivity & Efficiency

Standard Features

- Tier 4 Diesel Engine 450 hp (335kW)
 - Coupled to crusher and generator with hydraulic clutch
- 200 hp (150kW) generator and removable electrical panel with controls for all on-plant conveyors and vibratory equipment
 - Panel includes controls for two 25 hp (19 kW) off-plant conveyors (includes plugs and receptacles)
- Vibrating grizzly feeder 48" x 16' (1219 x 4877 mm); 25 hp (19 kW)
 - Straight 5' (1524 mm) long bolt-in adjustable grizzly bars
- 1/2" (13 mm) AR400 replaceable bolt-on side and floor liners
- 5/8" (16 mm) AR400 hopper
- Bypass chute diverts grizzly fines to undercrusher pan feeder
- Wireless remote control for feeder with back up remote (on-off speed control)
- Removable feeder module
- Screen, conveyors and magnet option move hydraulically into and out of transport position
- Triple axle suspension with 295/75 R22.5 tires
- Inclined screen 5' x 16' (1524 mm x 4877 mm) two deck, 15 hp (11kW)
 - Steeper top deck for improved scalping performance
 - 17° top deck and 15° bottom deck
 - Both decks can recirculate to crusher or discharge off plant
- 42" (1067 mm) fines conveyor 7.5 hp (5.6 kW)
- 48" (1219 mm) screen feed conveyor, 20 hp (15 kW)
- Two 24" (610 mm) reversible cross conveyors 5 hp (3.7 kW)
- 24" (610 mm) return conveyor 10 hp (7.5 kW)
- All conveyors include vulcanized 3 ply belts, CEMA C Class rollers, rubber disc return rolls and side guide rolls
- 300 gallon (1135 liter) fuel tank allows over 10 hours of run-time
- Four hydraulic leveling jacks with adjustable rear drop down support legs



- Lockable 4' (1219 mm) long side mounted storage box

Optional Equipment

- All electrical plant 300 hp (225 kW) crusher motor and drive
- Tier 3 diesel engine (in place of Tier 4F engine)
- Undercrusher 36" x 96" (914 x 2438 mm) high stroke pan feeder
 - Collects high impact crusher discharge and grizzly fines, reducing conveyor maintenance
 - Dual 3 hp (2.3kW) motors provide high energy feeder motion
- Self-cleaning permanent magnet
- Self-cleaning eltro magnet with panel enclosed rectifier circuit
- Hydraulic run-on jacks
- Two 32" (813 mm) stepped tapered cantilever tine grizzly sections
- Hydraulic lift system to remove feeder module from plant
- Hopper side extensions
- Removable side bulkheads
- 4 bar crusher rotor
- Crusher jib crane
- Screen wire cloth
- Screen wedge style clamp bolts
- Quad axle suspension
- Oversize 315/80 R22.5 tires

Ease of maintenance

- Service platforms by crusher, engine and screen sides
- Ratchet adjust crusher drive
- Conveniently located grease banks
- Pivoting screen base for easy access to screen wire

Weight Specifications

Triple Axle	Kingpin	Axles
With Feeder Module	49,720 lbs (22,555 kg)	76,350 lbs (34,630 kg)
Without Feeder Module	48,020 lbs (21,780 kg)	59,725 lbs (27,090 kg)

Triple Axle with Magnet	Kingpin	Axles
With Feeder Module	56,350 lbs (25,560 kg)	75,700 lbs (34,340 kg)
Without Feeder Module	54,750 lbs (24,835 kg)	59,450 lbs (26,965 kg)


Quad Axles	Kingpin	Axles
With Feeder Module	49,520 lbs (22,460 kg)	76,690 lbs (36,145 kg)
Without Feeder Module	47,890 lbs (21,725 kg)	63,000 lbs (28,575 kg)

Quad Axle with Magnet Option	Kingpin	Axles
With Feeder Module	55,800 lbs (25,310 kg)	79,100 lbs (35,880 kg)
Without Feeder Module	54,250 lbs (24,610 kg)	62,700 lbs (28,440 kg)

IP1313 Horizontal Impactor Crushing Chamber

Impact Crusher Specifications

- Hydraulically opened frame and apron adjustment
- High inertia 50" (1270 mm) diameter, 48" (1219 mm) wide 3 bar rotor with patented center pull wedge system
- Feed chute chain curtain
- Gas hydraulic power unit for crusher open and apron adjust

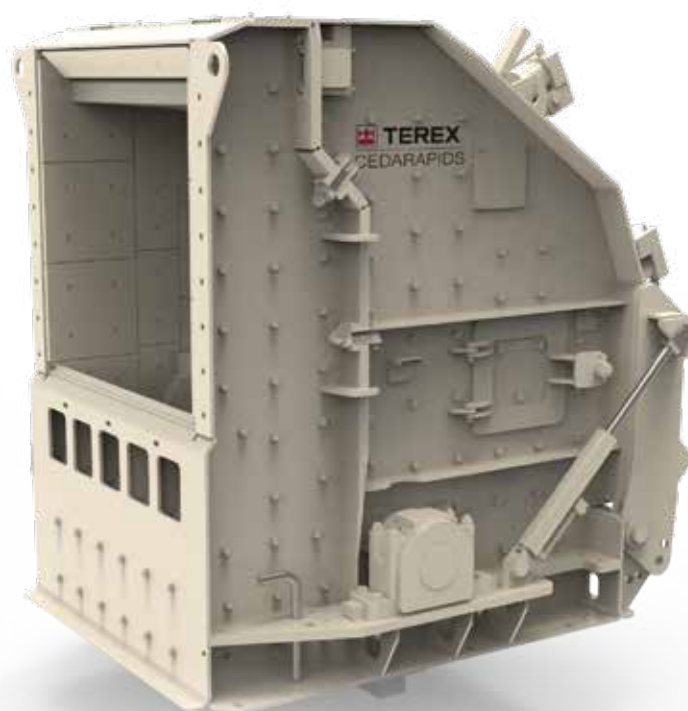

North America

3900 Fountains Blvd NE, Suite 101
Cedar Rapids, IA 52411
Tel: +1 319 363 3511 or +1 800 821 5600
Fax: +1 319 399 4871

212 South Oak Street
Durand, MI 48429
Tel: +1 989 288 3121
Fax: +1 989 288 4113

Europe, Russia & Africa

Farlough Road, Dungannon
Northern Ireland. BT71 4DT
Tel: +44 (0) 28 8744 0795

Central Asia, Turkey & North Africa Region

Mehmet Akif Ersoy Mah.287.SkNo 1/D
06172 Yenimahalle - Ankara Turkey
Tel: +90 312 354 90 90

Australia

Melbourne & Victoria
133 Logis Boulevard
Dandenong South, VIC 3175
Tel: +61 3 8794 4100
Fax: +61 3 9706 7810

Sydney & New South Wales

114 Hassall Street
Wetherill Park, NSW 2164
Tel: +61 2 9604 6524
Fax: +61 2 9604 9368

Brisbane & Queensland

585 Curtin Avenue East
Eagle Farm, QLD 4009
Tel: +61 7 3630 0866
Fax: +61 7 3630 1097

Perth & Western Australia

4 Miles Road
Kewdale, WA 6105
Tel: +61 8 6254 4100
Fax: +61 8 9350 5534

India

South :- Hosur Plant
Terex India Private Limited
E-18, Phase II, Expansion II,
Sipcot Industrial Complex
Hosur, Tamil Nadu 635109
Tel: + 91 4344 302 200
Fax: + 91 4344 302 201

North

Terex India Private Limited
907-908 9th Floor, Palm Spring Plaza,
Golf Course Road
DLF Phase 5, Sector 54, Gurugram - 122011 India

East

Terex India Private Limited
5th Floor Swastik Building
Nazrul Islam Avenue
Tegharia, Kolkata
West Bengal- 700059

West

Terex India Private Limited
5-129 5th Floor
Zenia Building, Hiranandani Circle
Hiranandani Business Park, Off Ghodbunder Road,
Thane Mumbai MH 400607

UAE

Middle East, East Africa, and SE Asia

Office # 305, Pinnacle Building
Sheikh Zayed Road, Al Barsha 1, Dubai, UAE
Tel: +971 4 399 0381
Fax : +971 4 399 0382

Malaysia

Subang Jaya, Selangor, Malaysia
Contact: Mr. Benjamin Tong
Tel: +60(3) 5622 6103 or +60(3) 5622 6199
Fax : +60(3) 5631 6211

Thailand

777/1, Moo 7, Bangplee-Tumru Road,
Bangpleeyai, Bangplee, Samutprakarn,
10540, Thailand
Tel: +66 2 316 4656 or +66 2 316 4658
Fax: +66 2 316 4660

www.terexmps.com
mpsmarketing@terex.com

Product specifications and prices are subject to change without notice or obligation. The photographs and/or drawings in this document are for illustrative purposes only. Refer to the appropriate Operator's Manual for instructions on the proper use of this equipment.

Failure to follow the appropriate Operator's Manual when using our equipment or failure to act responsibly may result in serious injury or death.

The only warranty applicable to our equipment is the standard written warranty applicable to the particular product and sale, and Terex makes no other warranty, express or implied. Terex, the Terex Crown design, Cedarapids, Canica, Simplicity, Jaques, El-Jay and Rollercone are trademarks of Terex Corporation or its subsidiaries. All rights are reserved. ©August 2019

