


MT24H HIGH LEVEL FEEDER



FEATURES & BENEFITS

The MDS MT24H high level feeder, combines the highly versatile feeder system and stockpiling conveyor, allowing the operator to directly discharge from wheel loaders to reduce the amount of material handling on site. The fully mobile units can be used for a 'metered or controlled' feed of material into any MDS products or other machines.

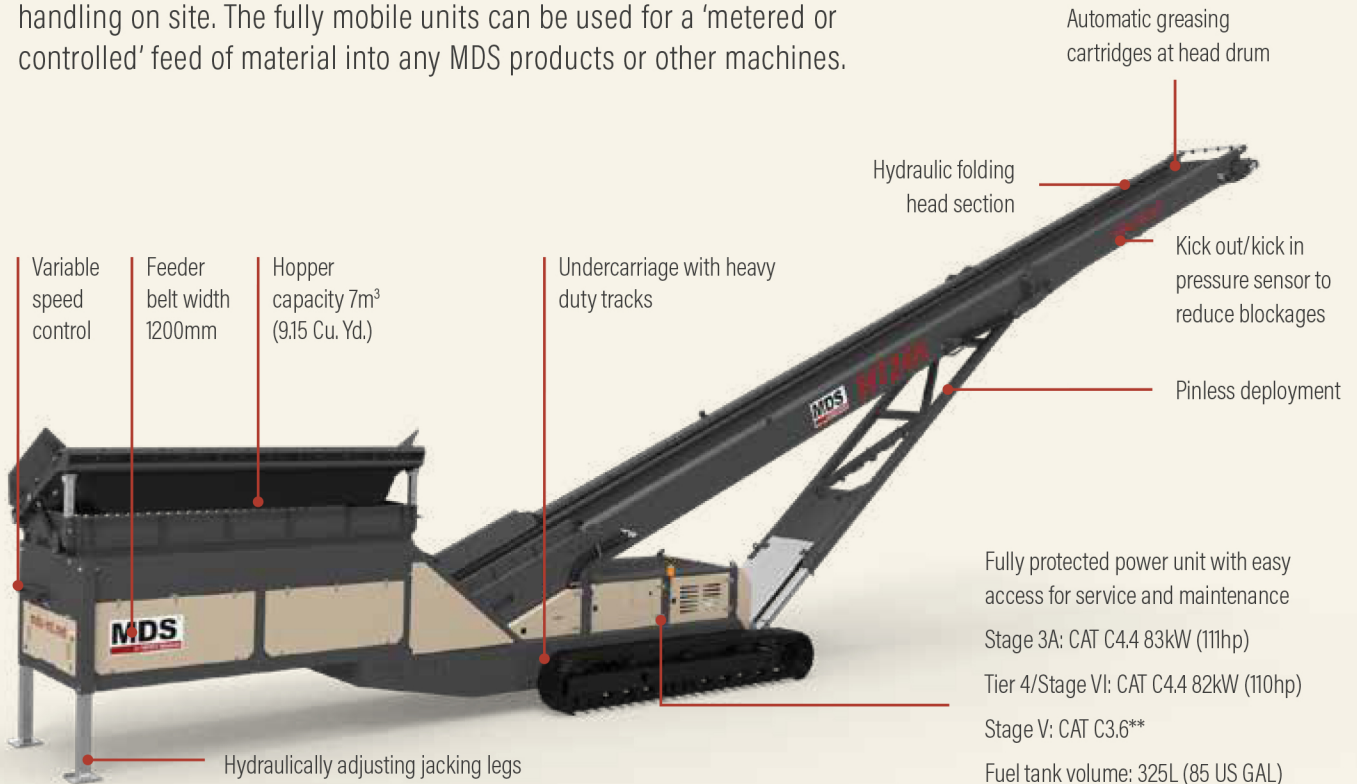

TRANSPORT DIMENSIONS

	HIGH LEVEL FEEDER
Length	19.5m (63' 11")
Width	2.75m (9')
Height	3.12m (10' 2")
Weight (Est.)	23,500kg (51,808lbs)
Containerised shipping	40' x 9' 6" 2 x High Cube Containers

CONVEYOR DETAILS

	HIGH LEVEL FEEDER
Discharge conveyor length	22.5m (73' 10")
Feeder length	4.1m (13' 11")
Belt width	1200mm (48")
Discharge height	8m (26' 3") @ 18°
Max. discharge height	9.8m (32' 2") @ 24°
Production capacity	Up to 600+TPH (661 US TPH)

OPTIONS*

AR400 steel wear liners in hopper
4" or 6" tipping grid fitted to feed conveyor
12ft 2-Deck vibrating grid with radio control tipping bofor grid
Upgraded hopper with integrated fall break system
Twin hydraulic drive feed conveyor
Twin Hydraulic Drive Discharge Conveyor
Discharge conveyor drive drum upgraded to ceramic lagging
Discharge conveyor fitted with chevron belt
High spec SCS scraper discharge conveyor at head drum
Canvas dust covers complete with dust hood on discharge conveyor
Dust suppression water spray bar at head drum on discharge conveyor
Full length skirting rubber along discharge conveyor
Belt weigher option
Overband magnet on discharge conveyor with hydraulic kit and support frames
Hybrid
Radio remote to stop/start feed conveyor, raise/lower discharge conveyor and tip grid
Radio remote to track machine
Telematics