

Service Call:

Adding Buttons on the Canview 4
Switch Panel

Tools Required:

Electrical Schematic

Model(s):

Units using the Canview 4 Switch Panel

Tech Tip Safety Rules



Danger

Failure to obey the instructions and safety rules in the appropriate Operator's Manual and Service Manual for your machine will result in death or serious injury. Many of the hazards identified in the operator's manual are also safety hazards when maintenance and repair procedures are performed.

Do Not Perform Maintenance Unless:

- You are trained and qualified to perform maintenance on this machine.
- You read, understand and obey:
 - manufacturer's instructions and safety rules
 - employer's safety rules and worksite regulations
 - applicable governmental regulations
- You have the appropriate tools, lifting equipment and a suitable workshop.

The information contained in this tech tip is a supplement to the service manual. Consult the appropriate service manual of your machine for safety rules and hazards.

Step 1

Press the middle button on the display until Settings are displayed. If *Settings* is not available, this version of the Switch Panel does not support programming by the user.




Click on *Settings* to continue.




Step 2

Use the up/down arrows to highlight *Control Settings*, then press the *Select* button.

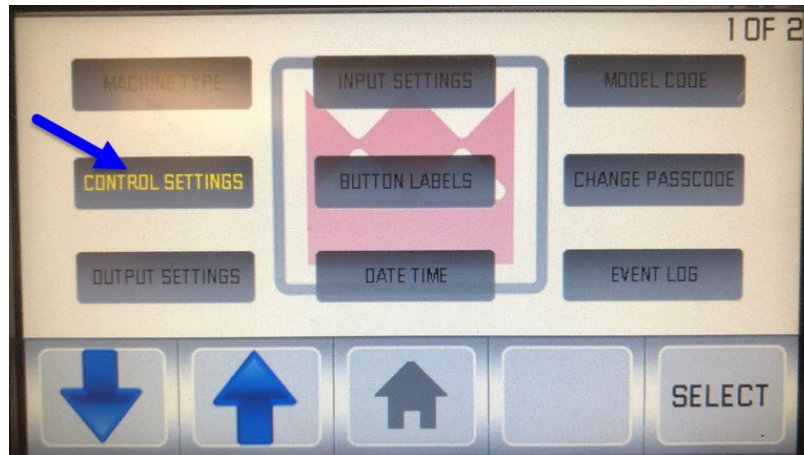

Step 3

Use the up/down arrows to highlight the *Number of Buttons*. Press the *Select* button and change the number of buttons used. The number of buttons can be increased or decreased in increments of four.

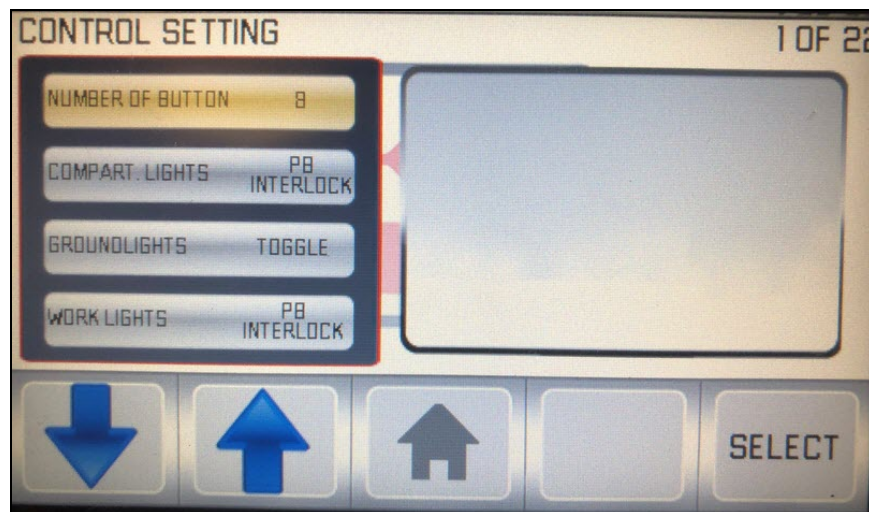


Step 4

Any buttons that are not used must be set to spare. From the *Setting* screen use the up/down arrows until *Button Labels* is highlighted. Press the *Select* button.



Use the up/down arrow to highlight buttons that are not used, then press the *Select* button. Use the up/down arrows until spare is selected as the option, then press *Select* again. This will be done for all unused buttons.

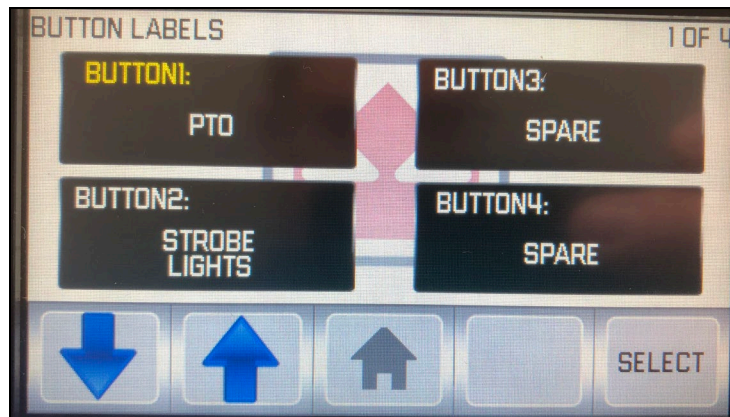

Note: Reference Tech-tip 123 for additions instructions to program the button.

Note: Not all Canview 4 switch panels have this ability. If you have any questions, contact Terex Utilities Technical Support at 1-844-Terex4U (1-844-837-3948) or utilities.service@terex.com

Note: Any changes made after factory installation should be noted in the electrical schematic provided with the unit. Contact Terex Utilities Technical Support at 1-844-Terex4U (1-844-837-3948) or utilities.service@terex.com to notify us about the change. Keeping our files up-to-date will enable the correct program to be loaded if a replacement switch panel is ordered in the future.