ProStack®
A TEREX BRAND



TF-9

BULK MATERIAL FEEDER

REDUCED COST

SITE OPERATING EFFICIENCY

ENVIRONMENTAL CONSIDERATIONS

IMPROVE HEALTH & SAFETY

PRODUCT QUALITY

TF-9

BULK MATERIAL FEEDER

ProStack®
A TEREX BRAND

PRODUCT OVERVIEW

The ProStack TF 9 is an ideal solution for feeding bulk material into a material processing system.

This robust feeder features a 4m x 1.2m heavy-duty belt that is inclined at an angle of 18 degrees, allowing for a throughput of up to 40 TPH.


The feeder is powered by a single electric motor drive that provides variable speed control via a VSD, ensuring efficient and reliable operation. The Prostack TF-9 also features a heavy-duty flared 5m3 (6.5 cu yd) hopper with selectable feed-in heights of 3.0m, 3.5m, 4.0m, and 4.5m, providing flexibility for a wide range of applications. Remote grease options ensure easy maintenance and prolong the lifespan of the feeder. Overall, the Prostack TF-9 Waste Feeder is a dependable and efficient solution for multiple applications.


TECHNICAL SPECIFICATION

Belt width	1200mm (3' 11")
Belt length	4000mm (13' 1")
Drive system	Electric (VSD)
Hopper capacity	min 5 cubic metres (6.5 cubic yards)
Belt spec	EP600 3 ply
Belt speed min	0.05m/s
Belt speed max	0.2m/s
Head drum	340mm (1' 1") lagged
Tail drum	290mm (11") lagged
Belt type (18 degrees)	Plain
Impact sections	Full with impact roller
Max load	2500kg (5512lb)
Rating	up to 40tph
Skirting rubber	20mm (0.8") thick full length
Options:	Rear Hopper Extensions 3.0m (9' 11") / 3.5m (11' 6") / 4.0m (13' 1") / 4.5m (14' 9") Feed-In Heights Remote Grease Options

*Ratings shown in metric tonnes per hour and based on average material density of 500kg/m^3 (845lbs/yd^3)

WORKING DIMENSIONS

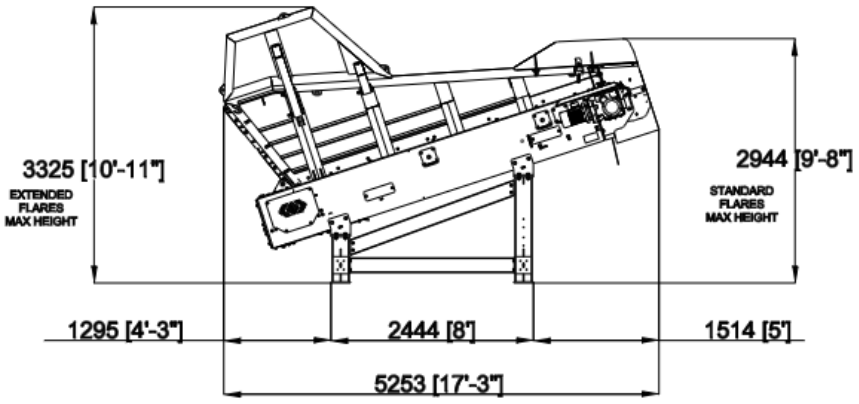

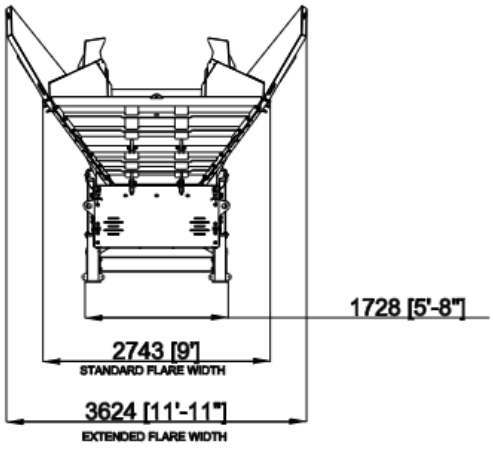

www.terex.com/prostack

Effective November 2026. Product specifications and prices are subject to change without notice or obligation. The photographs and/or drawings in this document are for illustrative purposes only. Refer to the appropriate Operator's Manual for instructions on the proper use of this equipment. Failure to follow the appropriate
Operator's Manual when using our equipment or to otherwise act irresponsibly may result in serious injury or death. The only warranty applicable to our equipment is the standard written warranty applicable to the particular product and sale and Terex USA LTD. makes no other warranty, express or implied. Products and services listed may be trademarks, service marks or trade-names of Terex Corporation and/or its subsidiaries in the USA and other countries. All rights are reserved. Terex® and ProStack is a registered trademark of Terex Corporation in the USA and many other countries.
Copyright June 2026 Terex USA Ltd.