

 **TEREX**® | UTILITIES

COMMANDER **SERIES**



BUILT. DIFFERENT.

1-844-TEREX-4U
WWW.TEREX.COM/UTILITIES



The Terex® Commander 4000 Series of digger derricks have been rock solid and reliable for decades. Terex digger derricks are known for the strength and stability of the dual hydraulic lift cylinders and the responsiveness of both full-pressure hydraulic and electric control options.


Model	Maximum Capacity	Capacity @10 ft. Radius	Sheave Height			Horizontal Reach			Digging Radius	
			A1	A2	A3	B1	B2	B3	S1	S2
C4042	29,250 lb (13,881 kg)	11,800 lb (5,323 kg)	26.8 ft (8.2 m)	34.6 ft (10.5 m)	42.5 ft (13.0 m)	16.5 ft (5.8 m)	24.5 ft (7.5 m)	32.5 ft (9.9 m)	14.0 ft (4.3 m)	22.0 ft (6.7 m)
C4045	27,500 lb (12,474 kg)	11,500 lb (5,216 kg)	27.7 ft (8.4 m)	36.6 ft (11.2 m)	45.5 ft (13.9 m)	17.5 ft (5.3 m)	26.5 ft (8.1 m)	35.5 ft (10.8 m)	15.0 ft (4.6 m)	24.0 ft (7.3 m)
C4047	24,750 lb (11,227 kg)	11,000 lb (4,990 kg)	29.7 ft (9.1 m)	38.6 ft (11.8 m)	47.4 ft (14.4 m)	19.5 ft (5.9 m)	28.5 ft (8.7 m)	37.5 ft (11.4 m)	17.0 ft (5.2 m)	26.0 ft (7.9 m)
C4050	24,600 lb (11,159 kg)	11,000 lb (4,990 kg)	29.7 ft (9.1 m)	40.0 ft (12.2 m)	50.4 ft (15.4 m)	19.5 ft (5.9 m)	30.0 ft (9.1 m)	40.5 ft (12.3 m)	17.0 ft (5.2 m)	27.5 ft (8.4 m)

Features

- Dual Lift Cylinders
- Rectangular Fiberglass Boom - Third Section - Rated at 46kV
- Box Beam Steel Lower and Intermediate Boom
- Hydraulic Boom Extension Intermediate & Upper
- Full Pressure Hydraulic Controls
- Custom Made Zoned Load Chart
- Hydraulic Tilting Pole Guides with Interlock
- Transferable Pole Guides
- Continuous Unrestricted Rotation
- 15,000 lb. Turntable Winch
- Meets or Exceeds ANSI A10.31
- Hydraulic Overload Protection (HOP)
- 100 Degrees of Boom Travel (+80 to -20)

Optional Equipment

- X and Y Boost for Increased Lifting Capacity
- Various Digger Motors
- Terex Manufactured Augers and Accessories
- Various Types of Full-Pressure Hydraulic Controls
- Flex Pro Electronic Control Console Options
- Compatible with Several Radio Remotes
- Boom-Tip Winch
- Various Command Post Configurations
- Multiple Pole Guide Sizes
- Fiberglass Personnel Platform
- Terex Hollow Kelly Bar
- Load Display

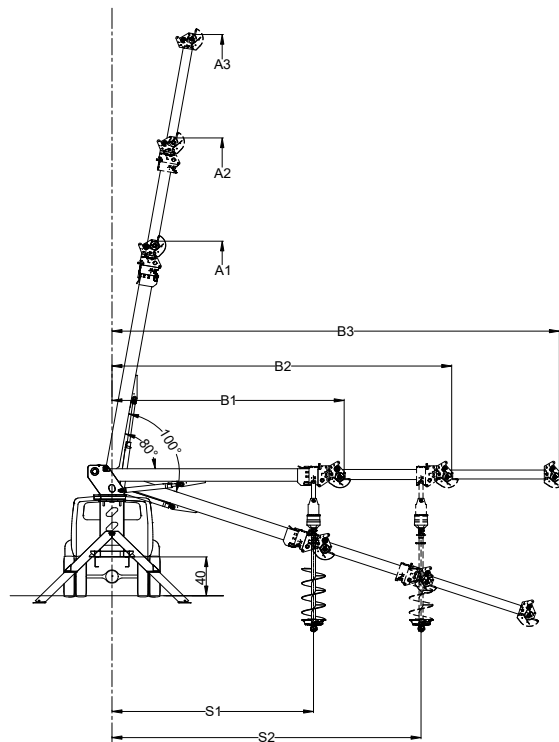

1-844-TEREX-4U

WWW.TEREX.COM/UTILITIES

BUILT. DIFFERENT.